
OF DENOM FOR



Version 1:20

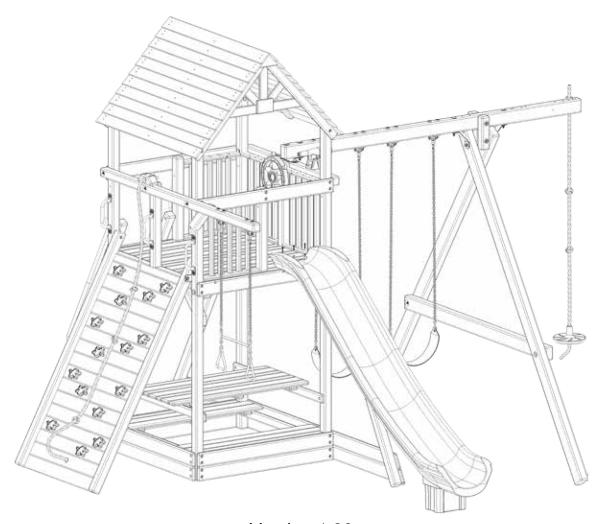

4465 West Sam Houston Parkway N. Houston, Texas 77041 WWW.TREEFROGSSHOWROOMS.COM

© 2018 KID STRUCTURES INC.

Sections

Section 1: Cover & Liability Info

Section 2: Product Parts

Section 3: Sub-Assemblies

Section 4: Main Assebmly

Section 5: Picnic/ Lower Floor

Section 6: Rail Options

Section 7: Playhouse Panel Install

Section 8: Treehouse Install

IMPORTANT - PLEASE READ

As fresh lumber acclimates to its new environment, the natural tendencies of the tree can show itself in the form of checks, or "cracks" in the lumber. In almost all cases this is normal and it will not affect the structural integrity of your play set.

Cosmetic defects that do not affect the structural integrity of the product, or natural defects of wood such as warping, checking or any other physical properties of wood that do not present a safety hazard, are not covered by this warranty.

Defects that develop because the product is exposed to extreme climate conditions are not covered by this warranty. Defects that develop as a result of faulty or improper installation of the product are also not covered by this warranty.

Most cracks are not warrantable, however if you believe that the integrity of your play set is compromised by this natural occurrence, please contact the Tree Frogs Swing Set Dealer that you purchased your swing set from.

We appreciate your purchase and know that you will enjoy your play system for many years to come.

Tools Needed for Assembly

Tape Measure 24" Level Angle Square

Phillips Screw Driver 3/8" Cordless Drill or Electric Drill 3/8" Drive Ratchet or Electric Impact Gun

Claw Hammeror Rubber Mallet Pliers or Vise Grips 7/16" Deep Well Socket

9/16" Deep Well Socket 3/4" Deep Well Socket 1/8", 1/4", and 9/16" Drill Bits

Phillips Head Screw Bits An Adult with two Adult Helpers

Please familiarize yourself with the install manual, parts/components and general construction process of your new swing set before getting started. Approximate assembly time: 6 to 8 hours. 6 foot unobstructed safety perimeter around swingset recommended.

Pre-Assembly Hints

- Depending on your experience, assembly of our play sets can take as little as 6 hours up to 24 hours, depending on size, after inventory of parts; therefore, we recommend you set aside a full two days for assembly.
- Identify all of the parts for your play set. Empty each box and lay out boards so you can see each part. Your instruction book will
 have detailed drawings that will make it easy for you to recognize individual parts. Keep all hardware and metal parts separate
 from wooden pieces.
- After everything is laid out, check carefully to ensure all parts are present. Make sure there are no broken boards.
- Find an area to sort your hardware. It is best to open the hardware on a solid surface so that you do not lose any pieces in the grass.
 - This will save time and familiarize you with all the different pieces in the hardware bag.
 - **Important note: Wood has some natural defects such as knots, surface cracks, etc... We reject parts that are structurally defective. We use a high quality lumber in our structures; however, you should inspect each part for splinters or rough spots and sand them smooth to prevent injury.**
- After familiarizing yourself with all of the components, read all instructions thoroughly. Reading instructions after you have studied the parts will help you understand more clearly the installation process, and help to eliminate unnecessary mistakes.
- Pay close attention to the diameter and length of each bolt and screw.
- Never tighten hardware completely at first. It helps to have some adjustment for bolt alignment while you are attaching parts together. After everything is square, tighten each joint.
- After the main unit is assembled it is critical that the floor is level and square. If the main frame is not level, the walls and floor will be out of square.
- After you complete installation, make sure every bolt, screw, and nut is tight, and every board is secure. Wood will expand and contract with the seasons.
- Place the set on level ground, not less than 6ft from any structure or obstruction such as a fence, garage, house, overhanging branches, laundry lines, or electrical wires.
- All 1/4" and 3/8" lag bolts must have pre-drilled holes 1-1/2" to 2" deep. Use a 1/8" drill bit for the 1/4" lag bolts and 1/4" drill bit for 3/8" lag bolts. Use pre-drilled holes in facias as a reference for placing lag bolt pilot holes.
- If a board lifts or rises causing a gap between boards when running in lag bolts or screws, back out the screw or lag bolt and press or apply pressure (but not enough to crack or break board) while re¬running in the lag bolt or screw in the same hole.
- Do not over tighten bolts, lag bolts or screws. You can damage boards, break hardware, and/or strip out the hardware.
- When using hammer do not beat on the hardware, but gently tap it in. Never beat on the wood as it will leave marks.

Leveling Your Swing Set During Assembly

- Complete the steps which will be the basic frame of the fort {i.e. four corner posts with base (sand box boards) and deck supports}
- Position in the most level area chosen for the play set, keeping in mind the location and size of the swing beam, ladder, slides, etc. that extend off the fort.
- Once the frame is in the final position, check for vertical and horizontal levelness to determine which side(s) will need to be dug into the ground to level the play set.
- With a shovel, score the ground around the outside edges of the sandbox boards on the 'high' side of the fort. This is the area that will be dug in. Make sure to score deep enough; the scored lines will be your digging template.
- Push the frame off and away from the scored area, far enough to dig and remove dirt to reach the appropriate depth.
- Dig a channel along the scored line(s) for the base of the fort (corner post and sandbox boards) to rest into. Dig the channel(s) to the same level depth. The bottom of the channel(s) should be level to each other so your frame doesn't teeter or rock because the channel(s) are uneven.
- Once you have removed enough grass and dirt, slide/push the frame into the channel(s). Place a level on the vertical and horizontal boards of the frame to determine if enough soil, or too much, was removed.
- Repeat this process until the basic frame is plumb and level and in its final position before completing the rest of the assembly.
- Measure to make sure fort is square.

^{**} Important: if you require a channel depth of more than 6",then we recommend you have your play set area professionally graded before completing assembly. **

Choosing A Location For Your Playset

When choosing a location for your swing set, always keep your child or children's safety in mind. Here are some recommendations to help you locate and install a safe play area.

- This play set is designed for the use of 4 occupants who have a combined weight not exceeding 800 pounds on the elevated floor; 3 occupants who have a combined weight of 525 pounds on the swing area; for a total Unit capacity of 5 occupants who have a combined weight of 1325. (this weight is not including the picnic table area)
- On-site adult supervision is required.
- The swing set should be located on level ground. The stationary components such as ladders and slides are required to be a minimum of six feet from any structure or obstruction such as a fence, garage, house, tree, overhanging branches, electrical wires, clotheslines, etc. Any swinging equipment is also required to be a minimum distance twice the height of the swing beam away from these obstructions or structures as well. The swing set should be located a safe distance from any water hazards, such as a lake, river, bayou, swimming pool, etc.
- Do not install this residential swing set in a commercial setting. This swing set is not manufactured for commercial usage and will void all warranties. Tree Frogs Wooden Swing Set Factory is not responsible for any damages or injuries resulting from this swing set being used in a commercial setting.
- Never install this swing set indoors; or over concrete, asphalt, packed earth, grass, carpet or any other hard surface. A fall onto a hard surface can result in serious or fatal injury.
- The U.S. Consumer Product Safety Commission (CPSC) recommends that you install and maintain a resilient surface under your swing set. The CPSC's Consumer Information Sheet for Playground Surfacing Materials is on the next page. A resilient surface, should be installed after the swing set has been completely assembled according to these instructions. The swing set must rest on solid ground. Please note that this swing set has a maximum fall height of 7'.

Maintaining Your Swing Set

Here are some maintenance tips required to insure safe play on your swing set for years of fun.

- At the beginning of each usage season and every two weeks during, check: nuts and bolts and tighten as needed, swing seats, chains, ladders, slides, rope and wood components for sign of deterioration and replace if necessary.
- On a yearly basis, we recommend that you coat your swing set with a sealant or preservative. You may also wantto spot sand any areas prior to sealing.
- ** Special note: Although we recommend that you reseal your swing set annually, you may have to touch up the high traffic areas and/or areas that have a high exposure to direct sunlight.**
- Be sure that the sealant you select is non-toxic and child safe. Your local Tree Frogs Wooden Swing Set Factory dealer may offer a complete power wash and reseal and maintenance program.
- Do not use line trimmers or "weed eaters" around your swing set. The line will remove both paint and wood from uprights and base pieces. Any damage resulting from this type of abuse is not covered under our limited warranty.
- Remove plastic swing seats and take in doors or do not use when temperature drops below 0°F.

Please keep this install manual for future reference.

To insure SAFE PLAY adults must teach children:

- Not to walk close to, in front of, behind, or between moving items.
- Not to swing empty swing seats.
- Not to swing sideways into the path of adjacent swings.
- Not to use the swing set in a manner other than that for which it is intended.
- Not to get off the equipment while it is in motion.
- Not to jump off the tower.
- Not to stand in the swing seats.
- Not to swing so high that chains become slack, or above the height of the swing support.
- Not to jump on a slide.
- Not to climb on top of the swing support.
- Not to attach to the swing set any item that is not specifically designed for use with the
 equipment, such as (but not limited to) jump ropes, clotheslines, pet leashes, cables, and
 chains. These may become strangulation hazards.
- To hold on to swings and climbers with both hands.
- To slide feet first, never head first.
- To watch for other children while swinging or playing near the swing set.

To also insure SAFE PLAY adults must:

- Limit climbing and swinging heights to each child's ability.
- Verify that suspended climbing ropes are secured at both ends.
- Verify that suspended climbing ropes cannot be looped back on themselves.
- Dress children appropriately for play. Use well-fitted shoes that do not have slippery soles.
- Avoid ponchos, scarves, hoods, loose fitting clothing, neckties, and any clothing with a drawstring.
 Serious injury could result should any part of the children's clothing become entangled in the swing set.
- Do not allow children to play wearing helmets.
- Remember that children are inventive. When they develop games that are unsafe, be alert and change the rules.

Weight limits for Treefrogs Swingsets

Fort Platform: 800 Lbs. Total Weight. Swing Belts: 175 Lbs.

<u>Trapeze</u>: 125 Lbs. <u>Full Bucket Swing</u>: 50 Lbs.

<u>Toddler Bucket Swing</u>: 50 Lbs. <u>Tire Swing</u>: 125 Lbs. Total Weight

Rope Ladder: 75 Lbs. Rock Wall: 150 Lbs.

All Slides: 125 Lbs.

Tree Frogs recommends that the weight limits for all components must not be exceeded.

Failure to adhere to these and other safety guidelines could result in damage to the swing set.

and/or injury to the users.

CONSUMER INFORMATION SHEET FOR PLAYGROUND SURFACING MATERIALS

The U.S. Consumer Product Safety Commission (CPSC) estimates that about 100,000 playground equipment related injuries resulting from falls to the ground surface are treated annually in U.S. hospital emergency rooms. Injuries involving this hazard pattern tend to be among the most serious of all playground injuries, and have the potential to be fatal, particularly when the injury is to the head. The surface under and around playground equipment can be a major factor in determining the injury-causing potential of a fall. It is self-evident that a fall onto a shock-absorbing surface is less likely to cause a serious injury than a fall onto a hard surface. However, it should be recognized that some injuries from falls will occur no matter what playground surfacing material is used.

Playground equipment should never be placed on hard surfaces such as concrete or asphalt. Grass may appear to be acceptable, but can turn to hard packed earth in areas of high traffic. Shredded bark mulch, wood chips, or fine gravel are considered to be acceptable shock absorbing surfaces when installed and maintained at a sufficient depth under and around play equipment.

MATERIAL	UNCOM	PRESSE	D DEPTH	COMPRESSED DEPTH
	6 Inch	9 Inch	12 Inch	9 inch
Wood Chips	7	10	11	10
Double Shredded Bark Mulch	6	10	11	7
Engineered Wood Fibers	6	7	>12	6
Fine Sand	5	5	9	5
Coarse Sand	5	5	6	4
Fine Gravel	6	7	10	6
Medium Gravel	5	5	6	5
Shredded Tires**	10-12	N/A	N/A	N/A

TABLE 1 -CRITICAL HEIGHTS (in feet) OF TESTED MATERIAL

Table 1 should be read as follows: If, for example, uncompressed wood chips are used at a minimum of 6 inches, the Critical Height is 7 feet. If 9 inches of uncompressed wood chips are used, the Critical Height is 10 feet. It should be noted that, for some materials, the Critical Height decreases when the material is compressed. It is recommended that a shock absorbing material should extend a minimum of 6 feet in all directions from the perimeter of stationary equipment such as climbers and slides. However, because children may deliberately jump from a moving swing, the shock absorbing material should extend in the front and rear of a swing a minimum distance of 2 times the height of the pivot point measured from a point directly beneath the pivot on the supporting structure.

This information is intended to assist in comparing the relative shock-absorbing properties of various materials. No particular material is recommended over another. However, each material is only effective when properly maintained. Materials should be checked periodically and replenished to maintain correct depth as determined necessary for your equipment. The choice of a material depends on the type and height of the playground equipment, the availability in your area, and its cost.

This information has been extracted from the CPSC publications "Playground Surfacing-Technical Information Guide" and "Handbook for Public Playground Safety." Copies of these reports can be obtained by sending a postcard to:

Office of Public Affairs
U.S. Consumer Product Safety Commission
Washington, D.C. 20207

Toll-free Hotline: 1-800-638-2772 or at http://www.cpsc.gov

^{**} This is data from tests conducted by independent testing laboratories on a 6 inch depth of uncompressed shredded tire samples produced by four manufacturers. The test reported critical heights, which varied from 10 feet to greater than 12 feet. It is recommended that persons seeking to install shredded tires as a protective surface request test data from the supplier showing the critical height of the material when it was tested in accordance with ASTM F1292.

2018 TREE FROGS Limited Lifetime Warranty

Limited 10-Year Warranty, Limited 5-Year Warranty

Tree Frogs Warranties all Jaguar Playcenter Series, Bengal Forts Series, MegaDeck Fort Series Redwood components and Cedar components against structural failure due to warping, wood rot, insect infestation (excluding Carpenter Bees) or decay for the period of 10 Years from the date of original purchase. This warranty does not cover cracks, fissions, checks, fading, knots and weathering that are normal natural characteristics of wood, that do not affect the structural integrity of the product. The Redwood and Cedar components warranty is extended to a Limited Lifetime Warranty to the original owner upon registering this warranty within 90 days of purchase at www.treefrogsswingsets.com.

Tree Frogs Warranties all Parrot Island Fort Series, Parrot Island Playcenter Series, Rainforest Cottage Series Cedar components against structural failure due to warping, wood rot, insect infestation (excluding Carpenter Bees) or decay for a period of 10 Years from the date of original purchase. This warranty does not cover cracks, fissions, checks, fading, knots and weathering that are normal natural characteristics of wood, that do not affect the structural integrity of the product.

Tree Frogs Warranties all Toucan Fort Series, Toucan Playcenter Series, Orangutan Fort Series, Stand Alone Swings Cedar components against structural failure due to warping, wood rot, insect infestation (excluding Carpenter Bees) or decay for a period of 5 Years from the date of original purchase. This warranty does not cover cracks, fissions, checks, fading, knots and weathering that are normal natural characteristics of wood, that do not affect the structural integrity of the product.

In addition, a 10-Year Limited Warranty applies to all roto-molded slides, ductile iron swing hangers, tire swivels, metal climbing rungs and swing beam brackets against failure due to rust or failure in defect in material. Surface rust, fading, weathering, cracks/chips in coatings and corrosion that do not affect structural integrity are not covered by this warranty. Furthermore, a 5-Year Limited Warranty applies to all components & accessories including all swings, chain ladders, gliders, handles, brackets, bubble panels, tarps, steering/ships wheels, telescopes, binoculars, buoy ball, blow molded slides and disc seat that are not covered under the 10-Year Warranty to be free from defects in material and workmanship. Surface rust, fading, weathering, cracks/chips in coatings and corrosion that do not affect structural integrity are not covered by this warranty.

And for a period of 1-Year Tree Frogs warranties all ropes, structural foam molded slides to be free of defects in material and workmanship. Fading is not considered a defect and may occur with seasonal and geographical conditions.

**10-Year Warranty Exclusion: Toucan Fort Series, Toucan Playcenter Series, Orangutan Series, Stand Alone Swings (Limite 5Yr/5Yr/1Yr WARRANTY).

This warranty is limited to a repair or replacement of the defective part. Product covered under this warranty will be shipped at the customer's expense. Tree Frogs is not responsible for any expense associated with freight, or delivery and installation of the warranted part(s). Tree Frogs reserves the right to inspect all warranty claim parts for which a claim has been made.

This limited warranty applies only to the original retail purchaser and for residential use only, non-residential use voids warranty. These warranties void when product is transferred or sold or no longer in possession by original owner. A copy of the original invoice must be presented to initiate warranty claim. This limited warranty does not cover damage from abuse, acts of God, vandalism, maintenance guideline neglect, alterations, normal wear & tear, use other than residential, unauthorized modification, damage due to moving of product or improper installation and or use. Any modification could damage the structural integrity of the play system and voids all warranties.

This warranty is exclusive and expressly in lieu of all other warranties, expressed or implied, including warranties of merchantability or fitness for use. Tree Frogs does not assume, or authorize any person to assume for us, any other liability in connection with the sale of our products.

This warranty gives you specific legal rights, and you also may have other rights that vary from state to state. Register your play system's warranty at www.treefrogsswingsets.com.

Tree Frogs reserves the right at any time to change product specifications or substitute similar components.

See your instruction manual for guidelines on regular maintenance. http://treefrogsshowrooms.com/installation-manuals/. Your child's play system & perimeter play zone should be inspected regularly for any wear & safety hazards.

KSI-405 6.5 Jaguar Fort Lumber	Description	QTY.
	405-1 50 1/8" Small Blank Rockwall Board	1
	(CC-003) 405-2 12 1/8" Long Fan Board	4
	(CC-015) 405-3 18" Center Fan Board	2
	(CC-051) 405-4 7 3/16" Center Fan Cap	2
	(CC-053) 405-5 9 9/16" Wood Roof Peak	2
	(CC-041) 405-6 42 1/2" Bottom Fan Board	2
	(CC-84) 405-7 50 1/8" 1-Rock Rockwall Board	7

KSI-405 6.5 Jaguar Fort Lumber	Description	QTY.
	(CC-085) 405-8 50 1/8" 2- Rock Rockwall Board	4
	(CC-086) 405-9 50 1/8" Blank Rockwall Board	4
	(CC-087) 405-10 50 1/8" Rope Hole Rockwall Board	1
	(CC-088) 405-11 27 1/2" Rail Spindle	20
	(CC-091) 405-12 12 7/8" Center Picnic Support	2
	(CC-092) 405-13 12 7/8" Picnic Side Support	4
	(CC-098) 405-14 20" Wood Roof Support	2

KSI-405 6.5 Jaguar Fort Lumber	Description	QTY.
	(CC-097) 405-15 24 1/2" Wood Roof Support	2
	(CC-100) 405-16 25" Rail Bottom	6
	(CC-099) 405-17 25" Rail Top	4
	(CC-105) 405-18 28 1/4" Picnic Center Support	1
	(CC-106) 405-19 28 1/4" Picnic Side Support	2
	(CC-104) 405-20 30" Deck Runner	4
	(CC-107) 405-21 48 1/8" Wood Roof Support	4

KSI-405 6.5 Jaguar Fort Lumber	Description	QTY.
	(CC-113) 405-22 54" Picnic Table Board	4
	(CC-114) 405-23 54" Deck Board	8
	(CC-115) 405-24 60 1/4" Picnic Support	4
	(CC-117) 405-25 60 3/4" Picnic Table Board	7
	(CC-123) 405-26 21 9/16" Step	7
	(CC-122) 405-27 30" Center Deck Support	2
	(CC-124) 405-28 54" Deck Board	6

KSI-405 6.5 Jaguar Fort Lumber	Description	QTY.
	(CC-125) 405-29 60 1/4" 4- Hole Facia	4
	(CC-126) 405-30 60 3/4" Picnic Table Board	7
	(CC-127) 405-31 60 3/4" 4- Hole Facia	3
	(CC-128) 405-32 60 3/4" 6- Hole Facia	2
	(CC-129) 405-33 60 3/4" 8- Hole Facia	2
	405-34 75" Support Wing Mainbeam	1
	405-35 150 3/4" Short Wing Runner	1

KSI-405 6.5 Jaguar Fort Lumber	Description	QTY.
	405-36 155 7/8" Long Wing Runner	1
	(CC-143) 405-37 9" Rope Block	1
	(CC-148) 405-38 19" Right Gusset	3
	(CC-149) 405-39 19" Left Gusset	2
	(CC-142) 405-40 25" Entrapment Block	1
	(CC-164) 405-41 32 1/8" Center Post	2
	(CC-165) 405-42 38 7/8" Center Upright	2

KSI-405 6.5 Jaguar Fort Lumber	Description	QTY.
	(CC-160) 405-43 60 1/4" SB Top Joist	1
	405-44 85 15/16" Wing Support Leg	2
	405-45 95 3/16" Left Rockwall Leg	1
	405-46 95 3/16" Right Rockwall Leg	1
	405-47 101" Left Ladder Leg	1
	405-48 101" Right Ladder Leg	1
	(CC-166) 405-49 104" Trapeze Arm	1

KSI-405 6.5 Jaguar Fort Lumber	Description	QTY.
	405-50 128" Corner Post	4
	(CC-187) 405-51 60 1/4" Mainbeam	2
	(CC-195) 405-52 67 1/2" Wood Roof Board	22
	(CC-240) 405-53 7 7/8" Center A-Frame Block	1
	(CC-244) 405-54 13 3/8" A-Frame Block Sinked	1
	(CC-243) 405-55 13 3/8" A-Frame Block	1
	(CC-245) 405-56 88" A-Frame Crossmember	1

KSI-405 6.5 Jaguar Fort Lumber	Description	QTY.
	(CC-246) 405-57 143" A-Frame Leg	2
	(CC-184) 405-58 132 5/8" Jaguar Universal Swingbeam	1

KSI-408 Playhouse Panel Lumber	Description	QTY.
	408-1 63 1/16" Door Stop	1
	408-2 63 11/16" Slim Door Board	2
	408-3 62 3/4" Center Wing Side Board	1
	408-4 64 1/8" Center Playhouse Panel Board	1
	(CC-027) 408-5 32 1/8" Door Side Cross Facia	2
	(CC-037) 408-6 60 1/4" Side Cross Facia	4
	(CC-040) 60 3/4" Store Cross Facia	2

KSI-408 Playhouse Panel Lumber	Description	QTY.
	(CC-005) 408-8 6" Door Knob Plate	1
	408-9 12 7/8" Upper Foor Filler	11
	408-10 14" Above Window Filler	14
	(CC-016) 408-11 20" Playhouse Window Arch	6
	(CC-018) 408-12 24 1/2" Door Cross Piece	2
	408-13 30 3/8" Under Window Filler	25
	(CC-030) 408-14 44 1/2" Store Arch	1

KSI-408 Playhouse Panel Lumber	Description	QTY.
	408-15 64 1/8" Store End Board	2
	408-16 14" Above Window Filler- Door Side	4
	408-17 30 3/8" Lower Door Side Filler	4
	408-18 14" Upper Store Center Filler	1
	408-19 30 3/8" Store Lower Center Filler	1
	408-20 14" Store Upper Wide Filler	2
	408-21 17" Playhouse Left Shutter	7

KSI-408 Playhouse Panel Lumber	Description	QTY.
	408-22 17" Right Playhouse Shutter	7
	(CC-048) 408-23 24 1/2" Large Door Botton Angled	1
	408-24 30 3/8" Playhouse Under Store Wide Board	2
	(CC-049) 408-25 32 1/8" Large Lower Door Side Crosspiece	1
	(CC-050) 408-26 35 1/4" Playhouse Store Counter	1
	408-27 63 11/16" Door Large Board	2
	408-28 64 1/4" Shutter Board- Wing Side	8

KSI-408 Playhouse Panel Lumber	Description	QTY.
	408-29 65 5/8" Shutter Board	8
	(CC-090) 408-30 60 3/4' Lower Deck Filler	1
	(CC-108) 408-31 35" Store Counter Support	1
	408-32 67 7/8" Playhouse Panel Upright	1


KSI-406 Treehouse Panel Lumber	Description	QTY.
	(CC-001) 406-1 24 13/16" Panel Filler Support	8
	406-2 8 3/4" Treehouse Center Holder	2
	406-3 10 1/2" Treehouse Panel Board #1	8
	406-4 10 1/2" Side Center Holder	2
	406-5 18" Side Center Panel Board	2
	406-6 19 1/2" Side Panel End Board	4
	(CC-016) 406-7 20" Window Arch	4

KSI-406 Treehouse Panel Lumber	Description	QTY.
	406-8 26 1/4" End Treehouse Panel Board	4
	406-9 29" Center Panel Board	2
	406-10 45 3/8" Panel Board #2	2
	(CC-038) 406-11 60 1/4" Side Facia	2
	406-12 10 1/2" Center Panel Board	4
	406-13 9 1/8" Left SB Side Shutter	1
	(CC-057) 406-14 14" Side Left Shutter	3

KSI-406 Treehouse Panel Lumber	Description	QTY.
	(CC-058) 406-15 14" Side Right Shutter	4
	406-16 15" Right Shutter	4
	406-17 15" Left Shutter	4
	406-18 19 1/2" Side Shutter Board	8
	406-19 30 1/2" Large Panel Board	4
	406-20 30 1/2" End Panel Board	4
	(CC-089) 406-21 27 1/2" Panel Filler	16

405-HWR-BAG 6.5 BENGAL FORT BASE HARDWARE


INSTALLER NOTE: (YOU MUST ASSEMBLE THIS PRODUCT IN ACCORDANCE WITH THESE ASSEMBLY INSTRUCTIONS. WHEN COMPLETE GIVE MANUAL TO OWNER.)

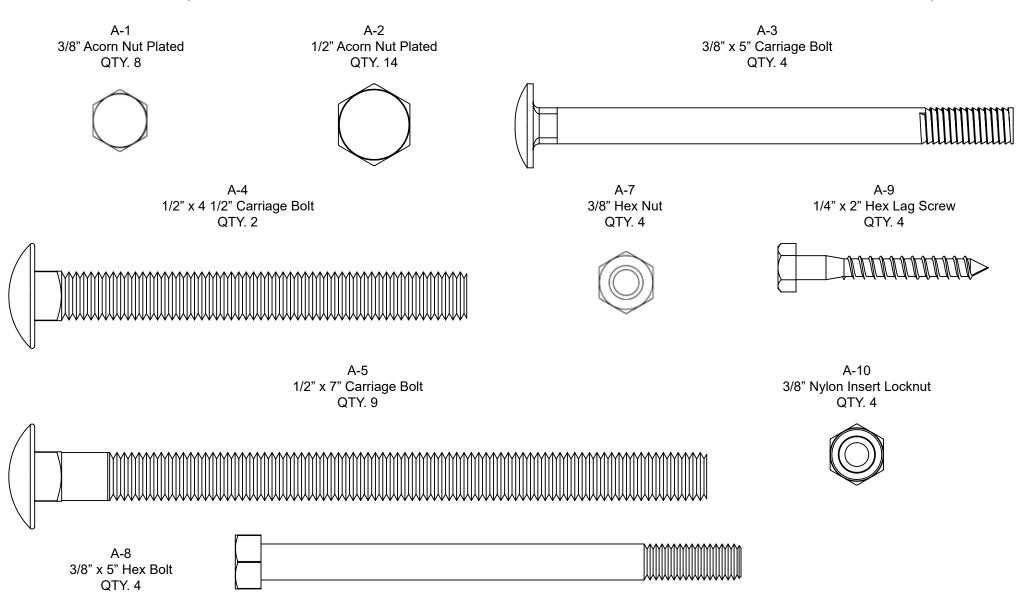

405-HWR-BAG 6.5 BENGAL FORT BASE HARDWARE

INSTALLER NOTE: (YOU MUST ASSEMBLE THIS PRODUCT IN ACCORDANCE WITH THESE ASSEMBLY INSTRUCTIONS. WHEN COMPLETE GIVE MANUAL TO OWNER.)

A-6 1/2" x 8" Carriage Bolt QTY. 3

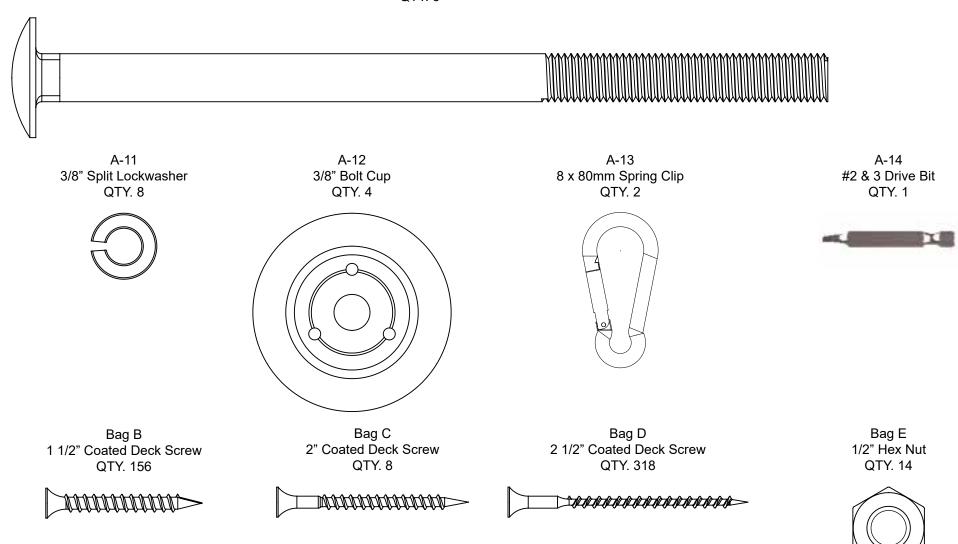

405-HWR-BAG 6.5 BENGAL FORT BASE HARDWARE


INSTALLER NOTE: (YOU MUST ASSEMBLE THIS PRODUCT IN ACCORDANCE WITH THESE ASSEMBLY INSTRUCTIONS. WHEN COMPLETE GIVE MANUAL TO OWNER.)


Bag F 1/4" x 3" Hex Lag Screw QTY. 22 Bag G 1/4" x 4 1/2" Hex Lag Screw QTY. 58






BAG H 3/8" x 3 1/2" Hex Lag Screw QTY. 83 Bag I 3/8" x 5" Hex Lag Screw QTY. 12






Bag J #14 x 2" Pan Phillips T/S QTY. 17





Bag M
1/2" Split Lockwasher












Bag N 1/4" USS Flatwasher QTY. 155





Bag P 1/2" USS Flatwasher QTY. 18












404-SB-HWR 5.8 SWINGBEAM HARDWARE

INSTALLER NOTE: (YOU MUST ASSEMBLE THIS PRODUCT IN ACCORDANCE WITH THESE ASSEMBLY INSTRUCTIONS. WHEN COMPLETE GIVE MANUAL TO OWNER.)

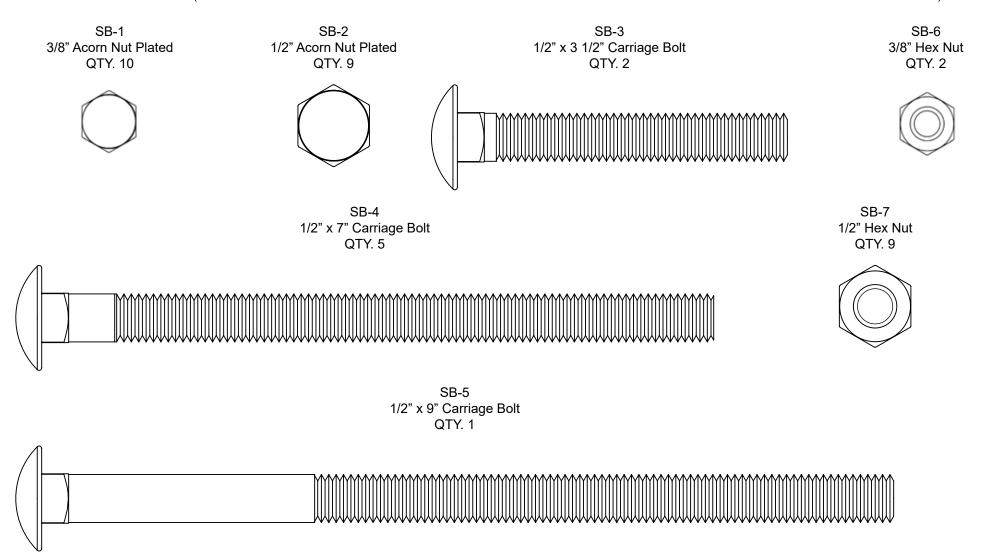

404-SB-HWR 5.8 SWINGBEAM HARDWARE


INSTALLER NOTE: (YOU MUST ASSEMBLE THIS PRODUCT IN ACCORDANCE WITH THESE ASSEMBLY INSTRUCTIONS. WHEN COMPLETE GIVE MANUAL TO OWNER.)

SB-8 SB-13 3/8" x 7" Hex Bolt 3/8" Nylon Insert Locknut QTY.8 QTY. 7 SB-9 3/8" x 10" Hex Bolt QTY. 2 **SB-10** 1/2" x 11 1/2" Hex Bolt QTY. 1 SB-11 SB-12 3/8" x 3 1/2" Hex Lag Screw 3/8" x 5" Hex Lag Screw QTY. 2 QTY. 2

404-SB-HWR 5.8 SWINGBEAM HARDWARE

INSTALLER NOTE: (YOU MUST ASSEMBLE THIS PRODUCT IN ACCORDANCE WITH THESE ASSEMBLY INSTRUCTIONS. WHEN COMPLETE GIVE MANUAL TO OWNER.)

SB-14 #14 x 1" Pan Phillips T/S QTY. 2




SB-15 3/8" Split Lockwasher QTY. 10




SB-16 1/2" Split Lockwasher QTY. 9




SB-17 3/8" USS Flatwasher QTY. 14




SB-18 1/2" USS Flatwasher QTY, 10




SB-19 3/4" USS Flatwasher QTY. 8



SB-20 3/8" Bolt Cup QTY. 20




SB-21 8 x 80mm Spring Clip QTY. 4



407-HWR-BAG PLAYHOUSE PANEL HARDWARE


INSTALLER NOTE: (YOU MUST ASSEMBLE THIS PRODUCT IN ACCORDANCE WITH THESE ASSEMBLY INSTRUCTIONS. WHEN COMPLETE GIVE MANUAL TO OWNER.)

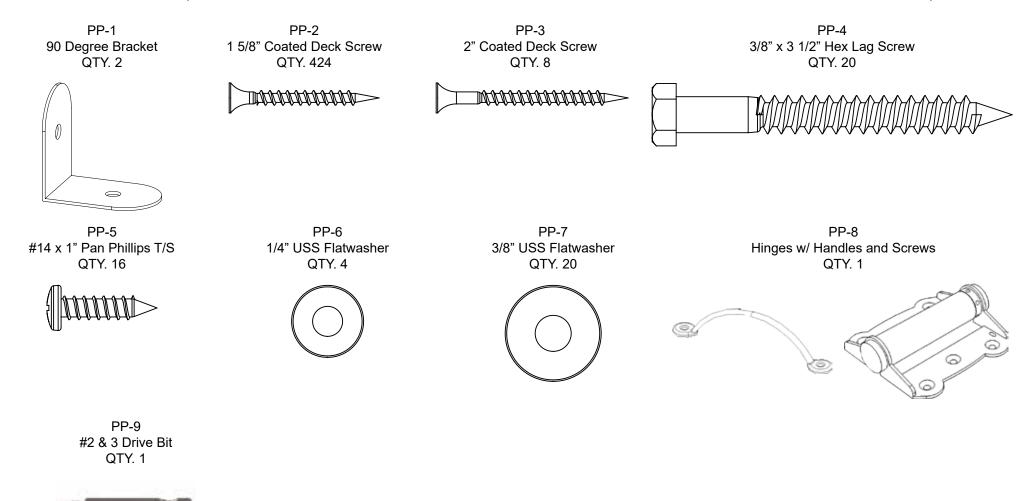


406-HWR-BAG TREEHOUSE PANEL HARDWARE

INSTALLER NOTE: (YOU MUST ASSEMBLE THIS PRODUCT IN ACCORDANCE WITH THESE ASSEMBLY INSTRUCTIONS. WHEN COMPLETE GIVE MANUAL TO OWNER.)

TP-1 1 1/2" Coated Deck Screw QTY. 385 TP-2 2" Coated Deck Screw QTY. 36 TP-3 1/4" x 3" Hex Lag Screw QTY. 4 TP-4 1/4" USS Flatwasher QTY. 4









TP-5 #2 & 3 Drive Bit QTY. 1



405- 6.5 Bengal Fort Accessories	Description	QTY.
	405-A Fort Ladder Bracket	2
	405-B 45 Degree Swingbeam Bracket	2
	405-C Swingbeam T-Plate	1
	405-D Playgrip Safety Handle	5
	405-E Playgrip Ladder Handle	2
	405-F 16' Yellow Rope	2
	405-G 20" Trapeze Bar	1

Picture	Description	QTY.
	405-H Disc Swing	1
	405-I Ductile Iron Swing Hanger	6
	405-J 84" Chained Belt Swing	2
	405-K Rockwall Rocks	15
	405-L Telescope	1
	405-M 19" Ships' Wheel	1

Ladder Assembly

PARTS NEEDED


405-48- 101" Right Ladder Leg-CC-123- 21 9/16" Step-CC-085- 50 1/8" 2- Rock Rockwall Board-

- (1) 405-47- 101" Left Ladder Leg-
- (7) CC-084- 50 1/8" 1- Rock Rockwall Board-
- (4)

Rockwall Boards

HARDWARE NEEDED

- (1) G- 1/4" x 4 1/2" Hex Lag Screw- (28)
 - N- 1/4" USS Flatwasher- (58)
 - K- 1/4" x 1 1/4" Pan Phillips M/S- (30)
 - L- 1/4" T-Nut- (30)

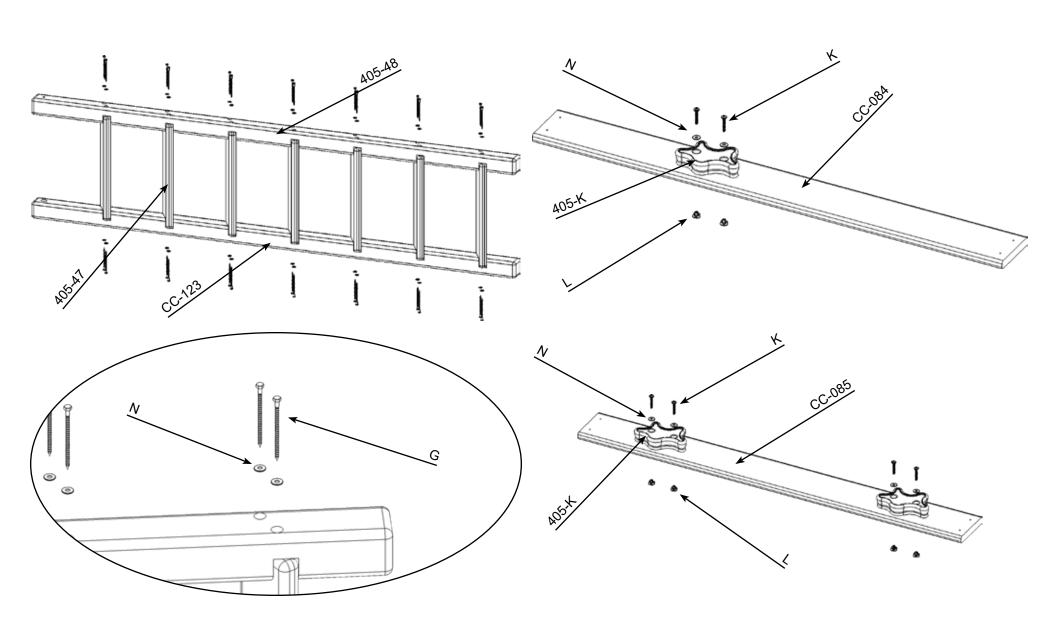

Rockwall Assembly

Deck Assembly (Make 2 Assemblies)

(1)

(4)

PARTS NEEDED


HARDWARE NEEDED

(124)

D- 2 1/2" Coated Deck Screw-

405-46- 95 3/16" Right Rockwall Leg-405-1-50 1/8" Small Blank Rockwall Board-CC-084- 50 1/8" 1- Rock Rockwall Board-CC-087- 50 1/8" Rope Hole Rockwall Board-CC-124- 54" Deck Board-CC-114- 54" Deck Board-


- (1) 405-45- 95 3/16" Left Rockwall Leg-(1) CC-085- 50 1/8" 2- Rock Rockwall Board-
 - CC-086- 50 1/8" Blank Rockwall Board-(4)
- (4) (2) (1) CC-104- 30" Deck Runner-
- (6) CC-122- 30" Center Deck Support-(8)

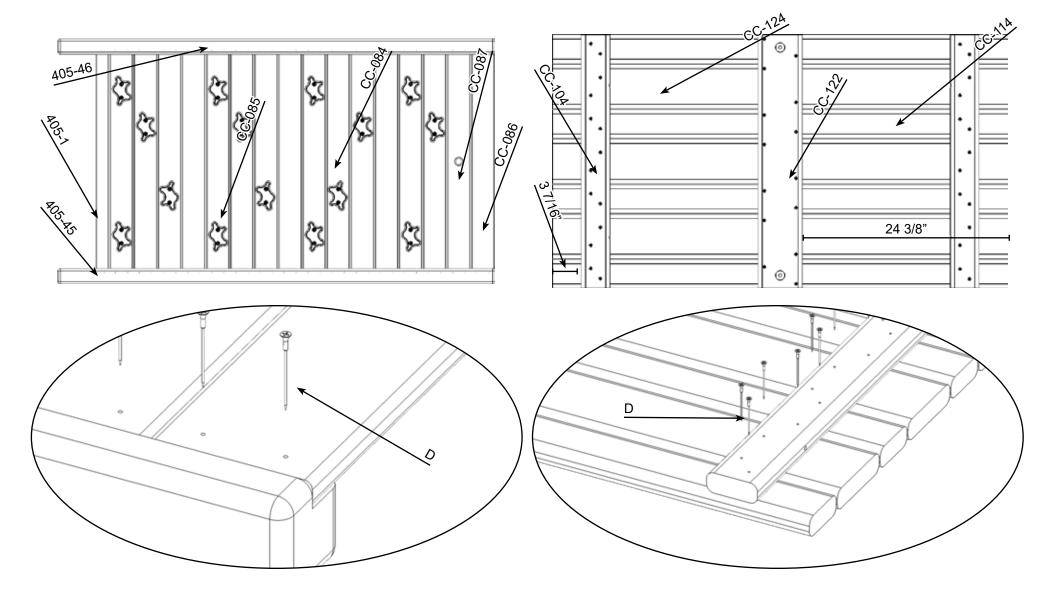

Wood Roof Fan (Make 2 assemblies)

PARTS NEEDED

CC-051- 7 3/16" Center Fan Cap-	(2)	B- 1 1/2" Coated Deck Screw-	(24)
CC-041- 42 1/2" Bottom Fan Cap-	(2)	_ , ,, , _ , ,,,,,,,,,,,,,,,,,,,,,,,,	(/
CC-015- 18" Center Fan Board-	(2)		
CC-003- 12 1/8" Long Fan Board-	(4)		

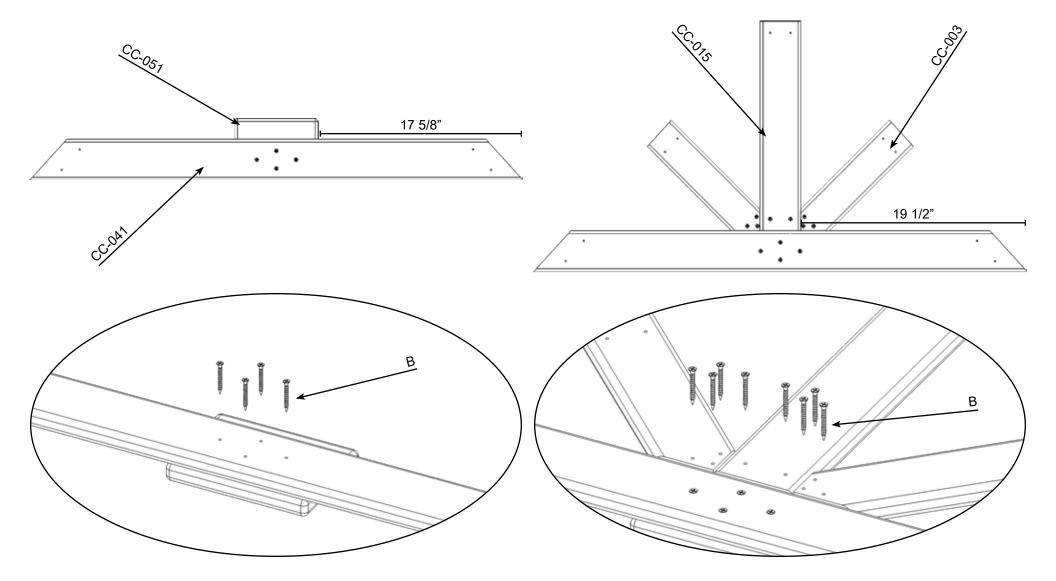

A-Frame Block Assembly

(1)

(4)

Beam Assembly

PARTS NEEDED

CC-240- 7 7/8" Center A-Frame Block-CC-244- 13 3/8" A-Frame Block Sunk-

CC-243- 13 3/8" A-Frame Block-

CC-184- 132 5/8" Universal Swingbeam-

405-I- Ductile Iron Swing Hanger-

SB-9- 3/8" x 10" Hex Bolt-(1)

(1) SB-17- 3/8" USS Flatwasher-

(1) SB-6- 3/8" Hex Nut-


SB-8- 3/8" x 7" Hex Bolt-

HARDWARE NEEDED

(9)(9)

(9) SB-15- 3/8" Split Lockwasher-SB-1- 3/8" Acorn Nut Plated-(1)

(9) SB-13- 3/8" Nylon Insert Locknut-

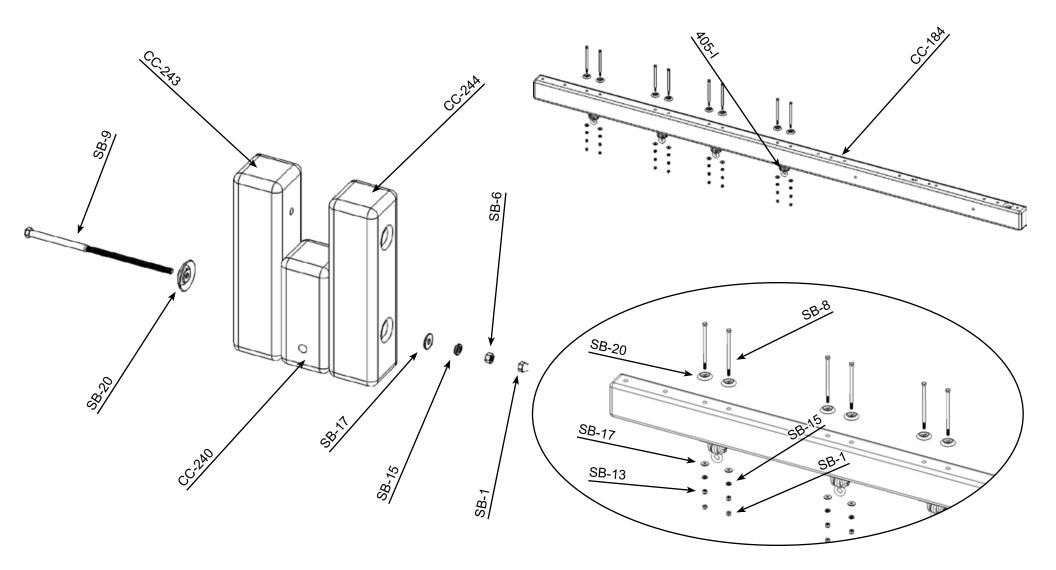


A-Frame Assembly

PARTS NEEDED


Beam Assembly-Block Assembly-CC-246- 143" A-Frame Leg-405-B- 45 Degree Swingbeam Bracket-

(1) (1) (2) (2)	SB-9- 3/8" x 10" Hex Bolt- SB-17- 3/8" USS Flatwasher- SB-6- 3/8" Hex Nut- SB-10- 1/2" x 11 1/2" Hex Bolt- SB-19- 3/4" USS Flatwasher- SB-4- 1/2" x 7" Carriage Bolt-	(1) (1) (1) (1) (1) (2)	SB-20- 3/8" Bolt Cup- SB-15- 3/8" Split Lockwasher- SB-1- 3/8" Acorn Nut Plated- SB-18- 1/2" USS Flatwasher- SB-16- 1/2" Split Lockwasher- SB-7- 1/2" Hex Nut-	(1) (1) (1) (4) (3) (3)
	SB-2- 1/2" Acorn Nut Plated-	(3)	GB-7- 1/2 TIGA Nut-	(5)

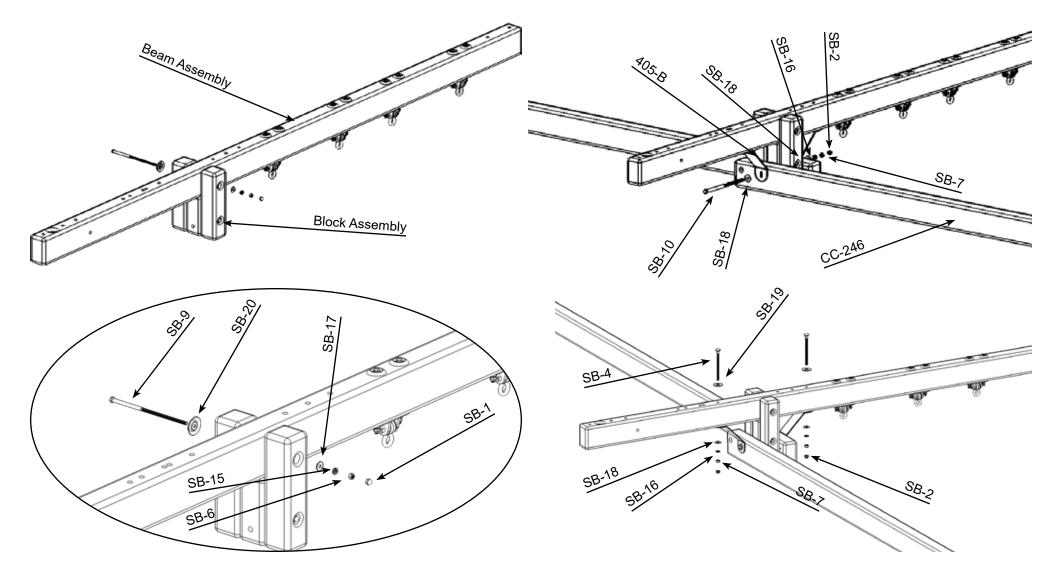


PARTS NEEDED

CC-160- 60 1/4" SB Top Joist- 405-50- 128" Corner Post- 405-35- 150 3/4" Short Wing Runner- 405-36- 155 7/8" Long Wing Runner-	(1) (2) (1) (1)	A-5- 1/2" x 7" Carriage Bolt- P- 1/2" USS Flatwasher- E- 1/2" Hex Nut- O- 3/8" USS Flatwasher-	(4) (4) (4) (4) (8)	Q- 3/4" USS Flatwasher- M- 1/2" Split Lockwasher- A-2- 1/2" Acorn Nut Plated- H- 3/8" x 3 1/2" Hex Lag Screw-	(4) (4) (4) (8)
CC-187- 60 1/4" Mainbeam-	(1)	O- 3/0 USS Flatwastiet-	(0)	n- 3/6 x 3 1/2 nex Lay Sciew-	(0)

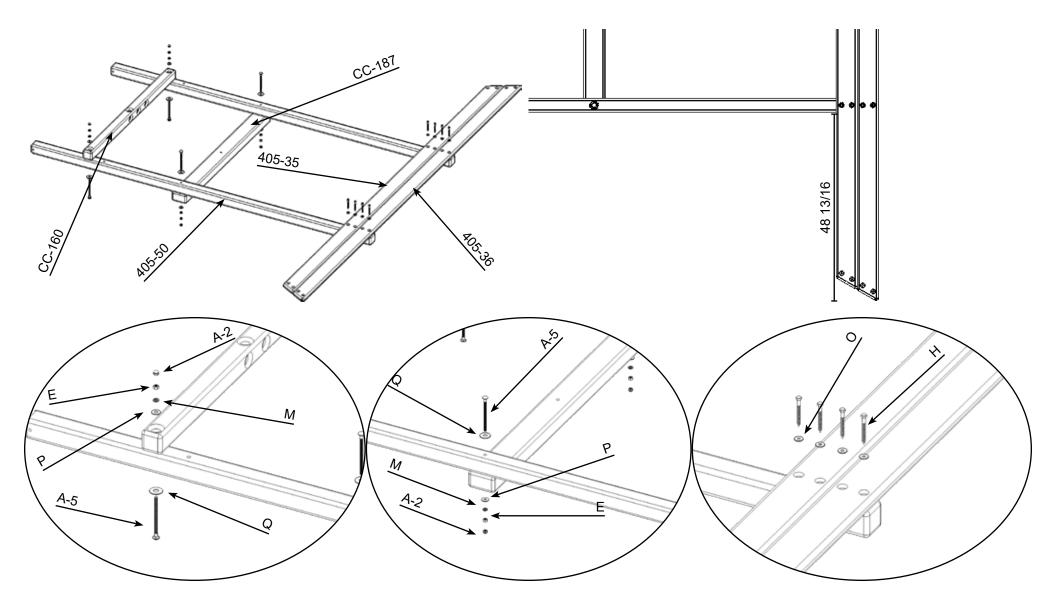

PARTS NEEDED

CC-165- 38 7/8" Center Upright- CC-149- 19" Left Gusset-	(1) (1)	A-5- 1/2" x 7" Carriage Bolt- P- 1/2" USS Flatwasher-	(2) (2)	Q- 3/4" USS Flatwasher- M- 1/2" Split Lockwasher-	(2) (2)
CC-148- 19" Right Gusset-	(1)	E- 1/2" Hex Nut-	(2)	A-2- 1/2" Acorn Nut Plated-	(2)
		H- 3/8" x 3 1/2" Hex Lag Screw-	(4)	O- 3/8" USS Flatwasher-	(4)

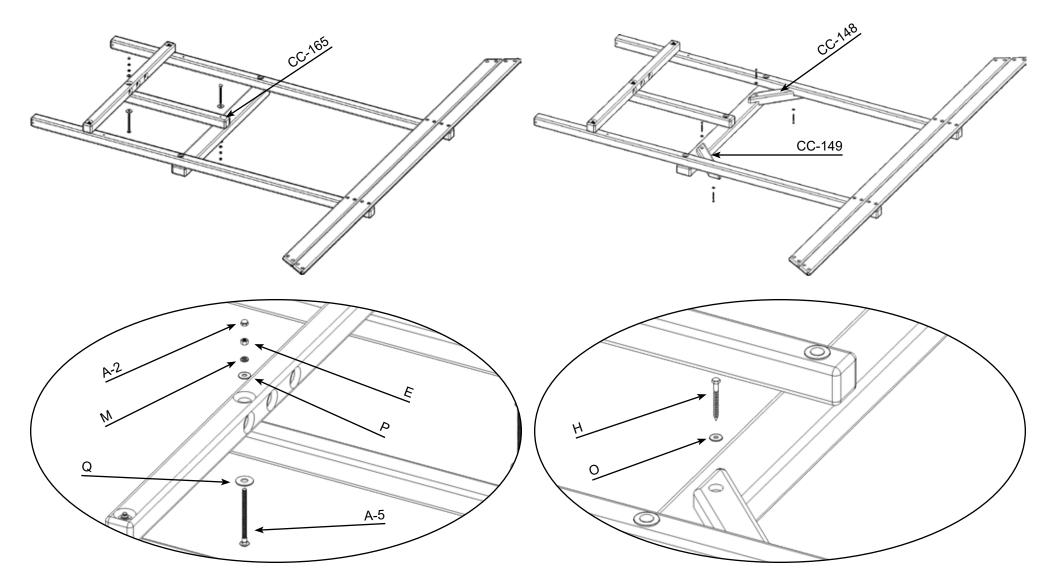

PARTS NEEDED

HARDWARE NEEDED

CC-100- 25" Rail Bottom-


(2)

A-9- 1/4" x 2" Hex Lag Screw-N- 1/4" USS Flatwasher-

(4)

CC-100'S SIT 1/2" ABOVE THE TOP OF THE GUSSETS

REMOVE THE 3 CARRIAGE BOLTS SEEN BELOW FOR THE NEXT STEP

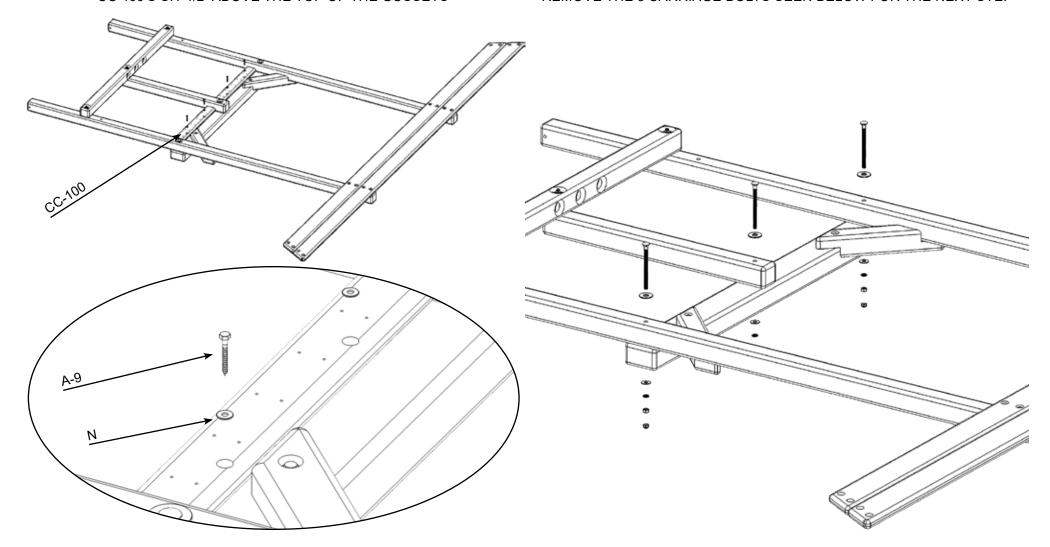

(1)

Swingbeam Side Wall Complete

PARTS NEEDED


405-34- 75" Support Wing Mainbeam-

A-2- 1/2" Acorn Nut Plated-M- 1/2" Split Lockwasher-Q- 3/4" USS FlatwasherHARDWARE NEEDED

(3) E- 1/2" Hex Nut(3)

P- 1/2" USS Flatwasher-(3)

(3) (3) A-8- 1/2" x 8" Carriage Bolt-

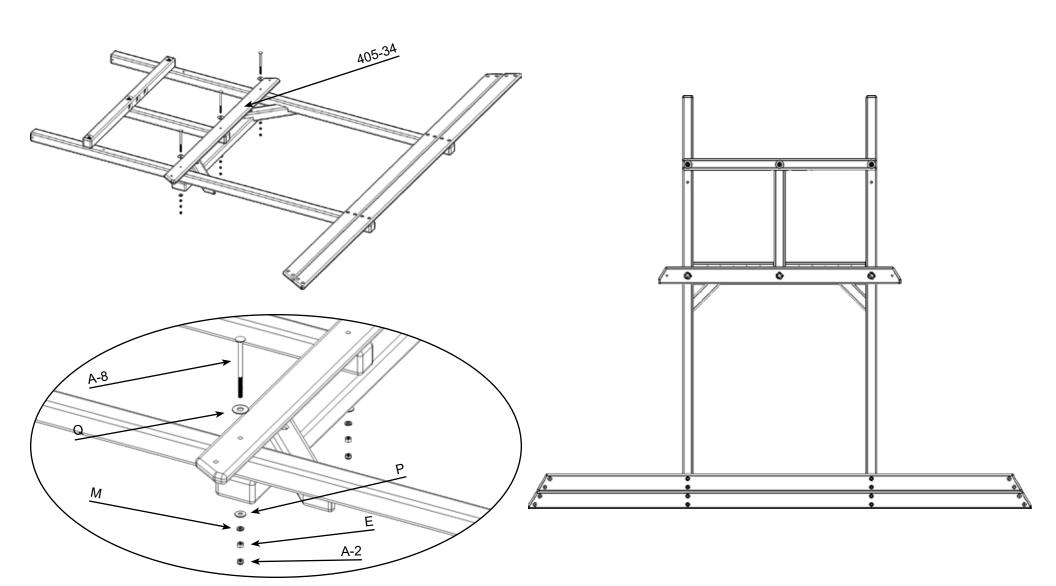

Trapeze Side Wall

PARTS NEEDED

A-5- 1/2" x 7" Carriage Bolt-P- 1/2" USS Flatwasher-

Q- 3/4" USS Flatwasher-(4) M- 1/2" Split Lockwasher-

HARDWARE NEEDED

CC-166- 104" Trapeze Arm-(1) (1) CC-187- 60 1/4" Mainbeam-(2) 405-50- 128" Corner Post-CC-125- 60 1/4" 4- Hole Facia-


(4) (4) (4) (8) A-2- 1/2" Acorn Nut Plated-(4)

E- 1/2" Hex Nut-

(2)

H- 3/8" x 3 1/2" Hex Lag Screw-

O- 3/8" USS Flatwasher-

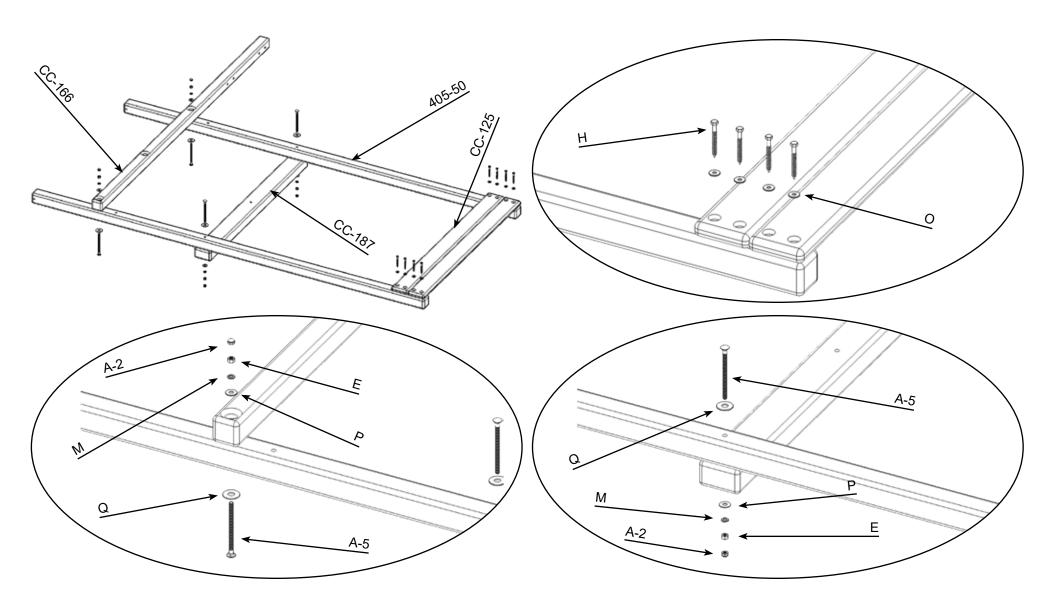

Trapeze Side Wall

PARTS NEEDED

CC-165- 38 7/8" Center Upright-CC-149- 19" Left Gusset-CC-148- 19" Left Gusset-

A-5- 1/2" x 7" Carriage Bolt-(1)

(1) P- 1/2" USS Flatwasher-(1) E- 1/2" Hex Nut-

H- 3/8" x 3 1/2" Hex Lag Screw-


Q- 3/4" USS Flatwasher-

HARDWARE NEEDED

(2) (2) M- 1/2" Split Lockwasher-

(2) A-2- 1/2" Acorn Nut Plated-

(2) (2) (2) (4) O- 3/8" USS Flatwasher-

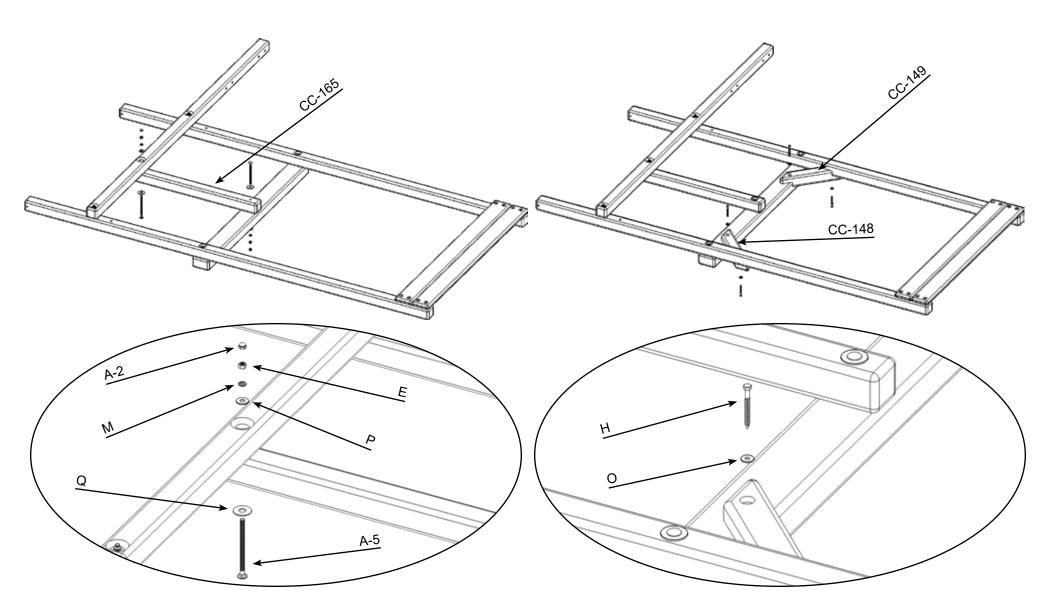

Trapeze Side Wall

PARTS NEEDED

(2)

405-I- Ductile Iron Swing Hanger-

A-8- 3/8" x 5" Hex Bolt-


HARDWARE NEEDED A-12- 3/8" Bolt Cup-


(4) O- 3/8" USS Flatwasher-

(4) A-11- 3/8" Split Lockwasher-

A-10- 3/8" Nylon Insert Locknut-

(4) (4) (4) A-1- 3/8" Acorn Nut Plated-

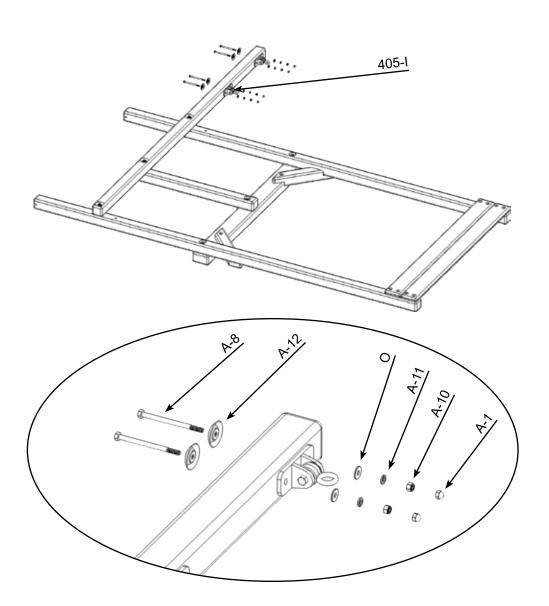

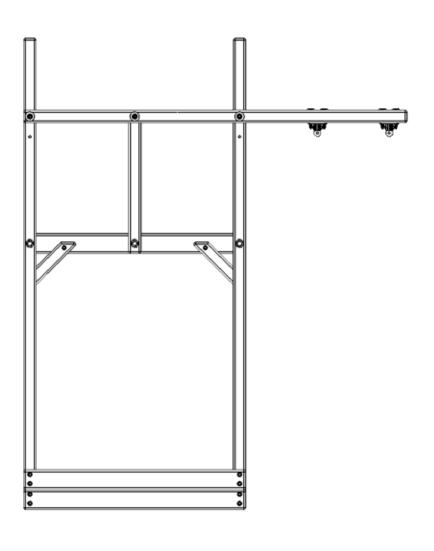

PARTS NEEDED

HARDWARE NEEDED

CC-127- 60 3/4" 4- Hole Facia-(4) (2) Deck Assemblies-

O- 3/8" USS Flatwasher-


H- 3/8" x 3 1/2" Hex Lag Screw-

(16) (16)

G- 1/4" x 4 1/2" Hex Lag Screw-

(8)

N- 1/4" USS Flatwasher-

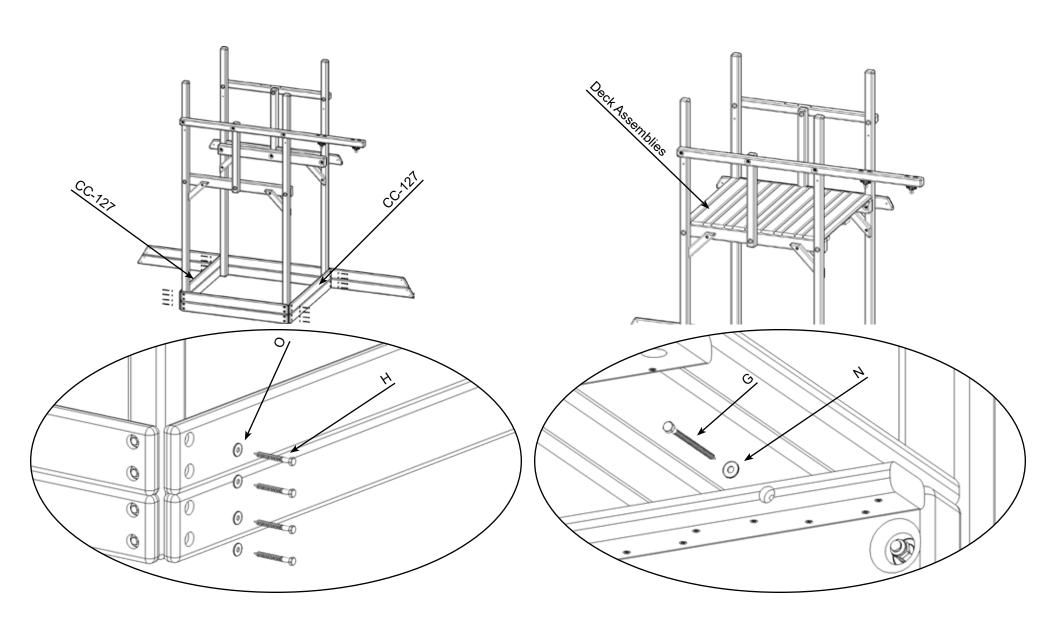

PARTS NEEDED

CC-129- 60 3/4" 8- Hole Facia-

CC-128- 60 3/4" 6-Hole Facia-

(2) (2)


H- 3/8" x 3 1/2" Hex Lag Screw-

HARDWARE NEEDED

O- 3/8" USS Flatwasher-N- 1/4" USS Flatwasher(16) (16) (8)

(8)

G- 1/4" x 4 1/2" Hex Lag Screw-

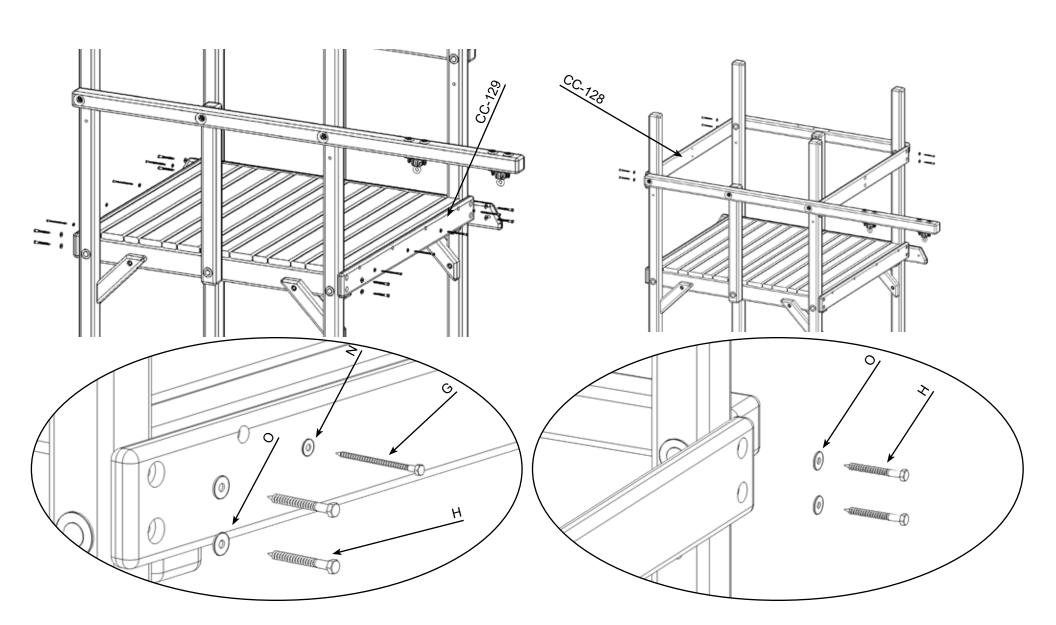


PARTS NEEDED

HARDWARE NEEDED

CC-164- 32 1/8" Center Post-CC-142- 25" Entrapment Block(2) (2)

O- 3/8" USS Flatwasher-H- 3/8" x 3 1/2" Hex Lag Screw(10) (4) (6)


I- 3/8" x 5" Hex Lag Screw-

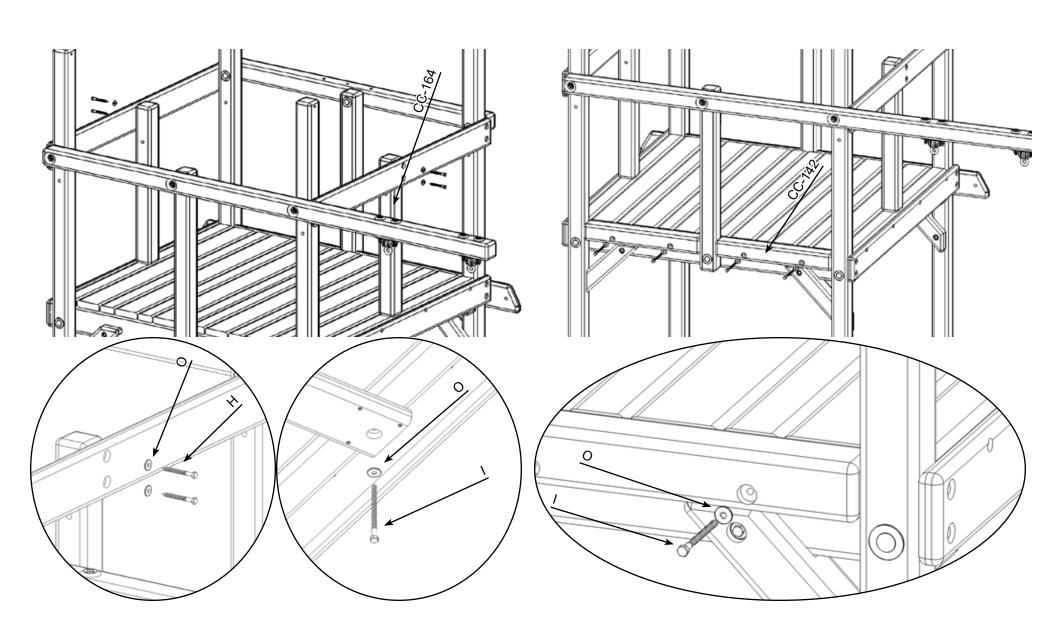

PARTS NEEDED


Rockwall Assembly-	(1)
405-44- 85 15/16" Wing Support Leg-	(2)
405A- Fort Laddder Bracket-	(1)

O- 3/8" USS Flatwasher-	(12)	I- 3/8" x 5" Hex Lag Screw-	(2)
H- 3/8" x 3 1/2" Hex Lag Screw-	(10)	A-4- 1/2" x 4 1/2" Carriage Bolt-	(2)
Q- 3/4" USS Flatwasher-	(2)	P- 1/2" USS Flatwasher-	(2)
M- 1/2" Split Lockwasher-	(2)	E- 1/2" Hex Nut-	(2)
A-2- 1/2" Acorn Nut Plated-	(2)		` '

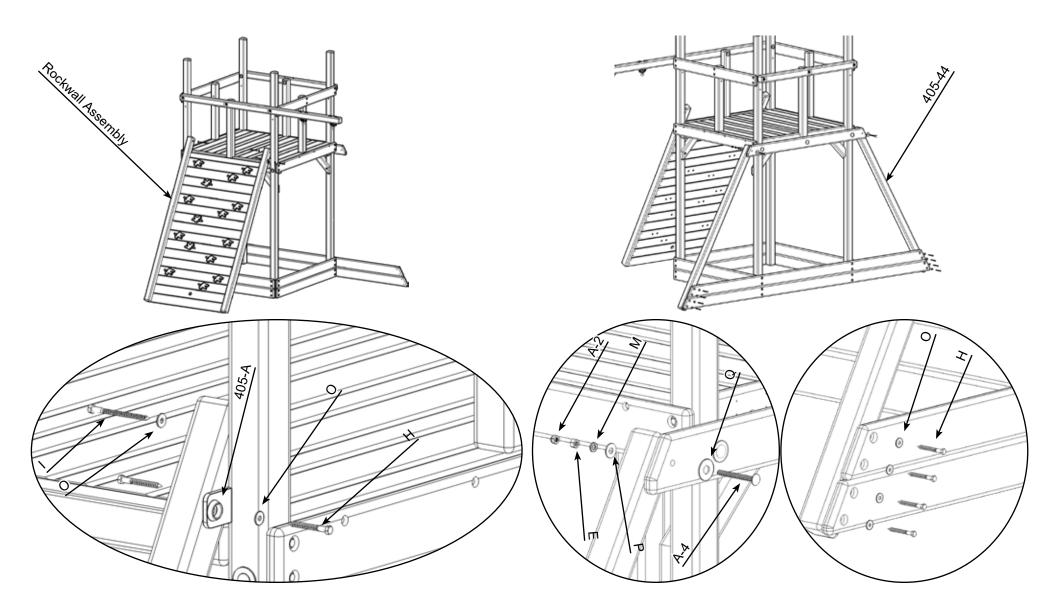

PARTS NEEDED

Ladder Assembly-	(1)	O- 3/8" USS Flatwasher-	(6)
CC-148- 19" Right Gusset-	(1)	I- 3/8" x 5" Hex Lag Screw-	(2)
405-A- Fort Ladder Bracket-	(1)	H- 3/8" x 3 1/2" Hex Lag Screw-	(4)

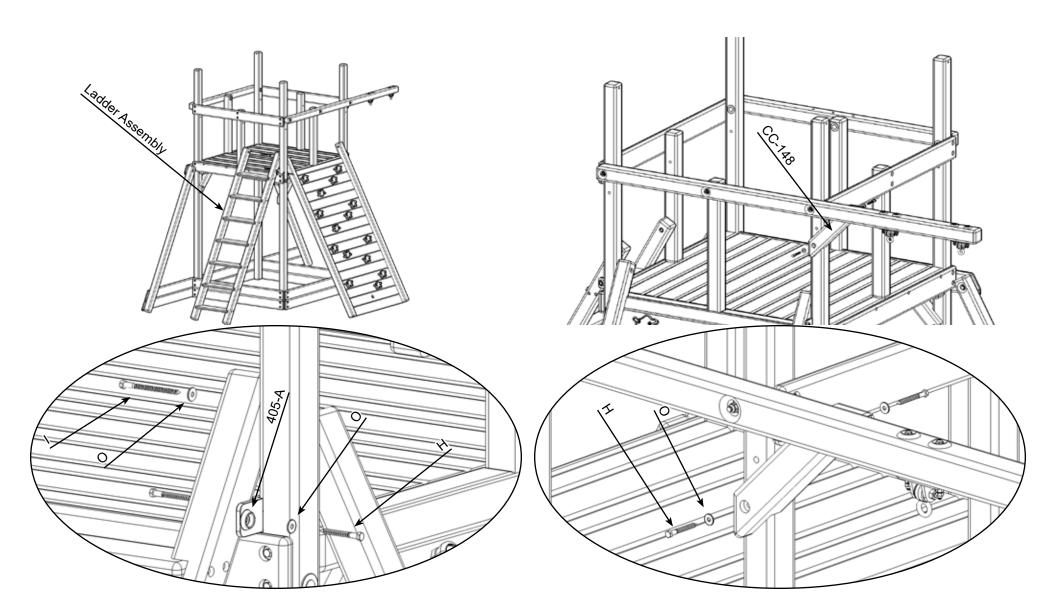



PARTS NEEDED

HARDWARE NEEDED

CC-143- 11" Rope Block-405-F- 16' Yellow Rope(1) (1)

I- 3/8" x 5" Hex Lag Screw-O- 3/8" USS Flatwasher(2) (2)

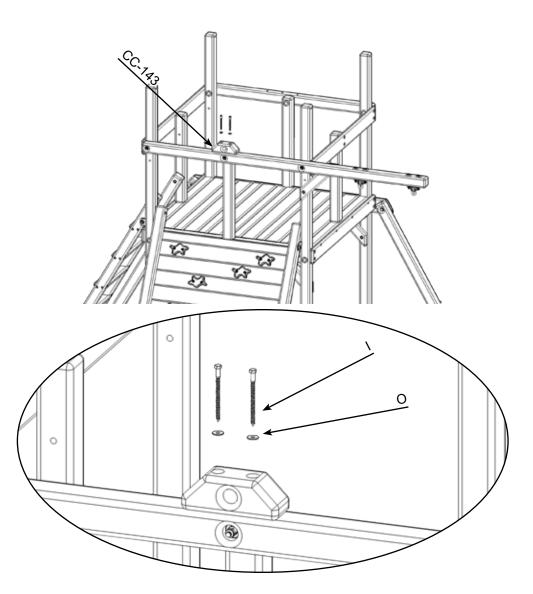

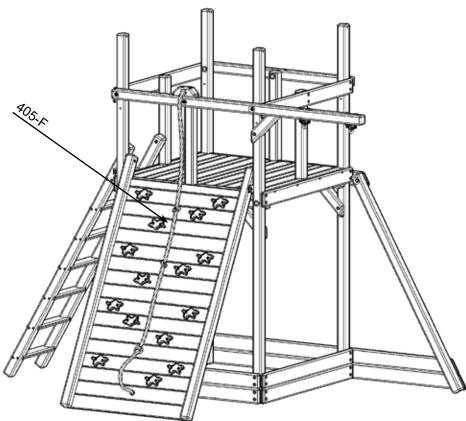


SLIDE 405-F THROUGH CC-143 AND TIE A KNOT HOLDING IT IN PLACE. WORK YOUR WAY DOWN TYING A KNOT EVERY 2 TO 3 FEET UNTIL YOU STRING THE ROPE THROUGH CC-087 AND TIE A KNOT SECURING THE ROPE TO THE ROCKWALL.

PARTS NEEDED

CC-107- 48 1/8" Wood Roof Support-	(4
CC-053- 9 9/16" Wood Roof Peak-	(2

<u>HARDWARE NEEDED</u>

A-3- 3/8" x 5" Carriage Bolt-	(4)	P- 1/2" USS Flatwasher-	(4)
O- 3/8" USS Flatwasher-	(4)	A-11- 3/8" Split Lockwasher-	(4)
A-7- 3/8" Hex Nut-	(4)	A-1- 3/8" Acorn Nut Plated-	(4)
D- 2 1/2" Coated Deck Screw-	(4)	C- 2" Coated Deck Screw-	(8)

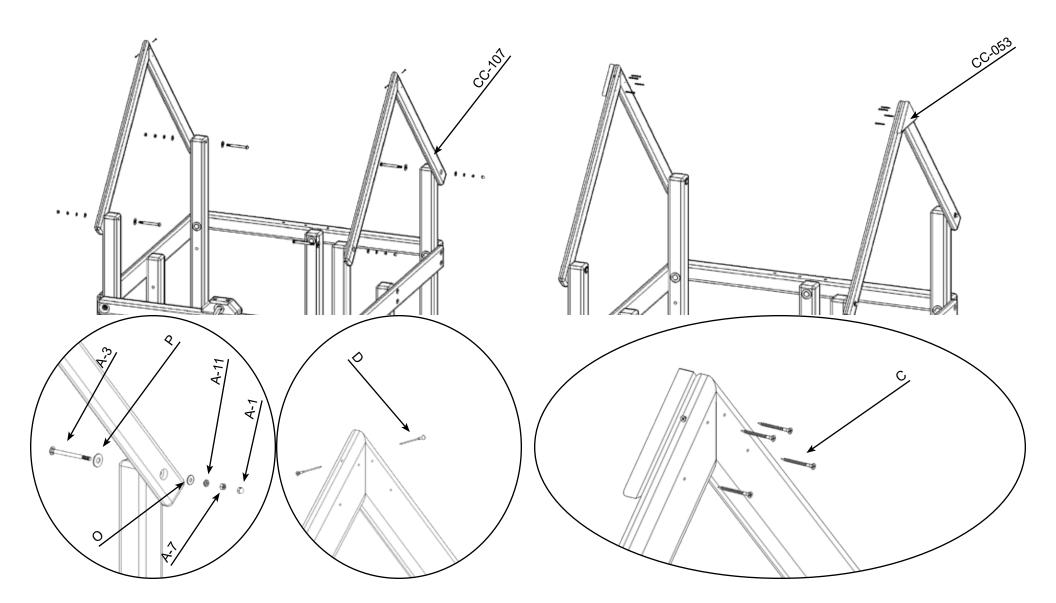

PARTS NEEDED


HARDWARE NEEDED

CC-195- 67 1/2" Wood Roof Board-

(8) (2) B- 1 1/2" Coated Deck Screw-

(40)

CC-097- 24 1/2" Wood Roof Support-

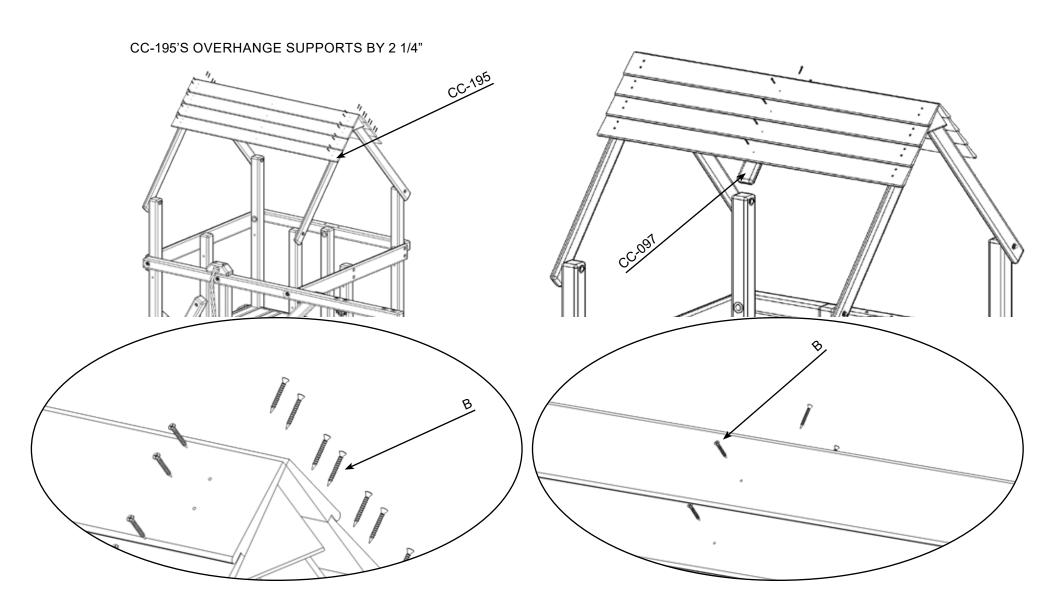


PARTS NEEDED

HARDWARE NEEDED

CC-195- 67 1/2" Wood Roof Board-CC-098- 20" Wood Roof Support(10) (2) B- 1 1/2" Coated Deck Screw-

(50)

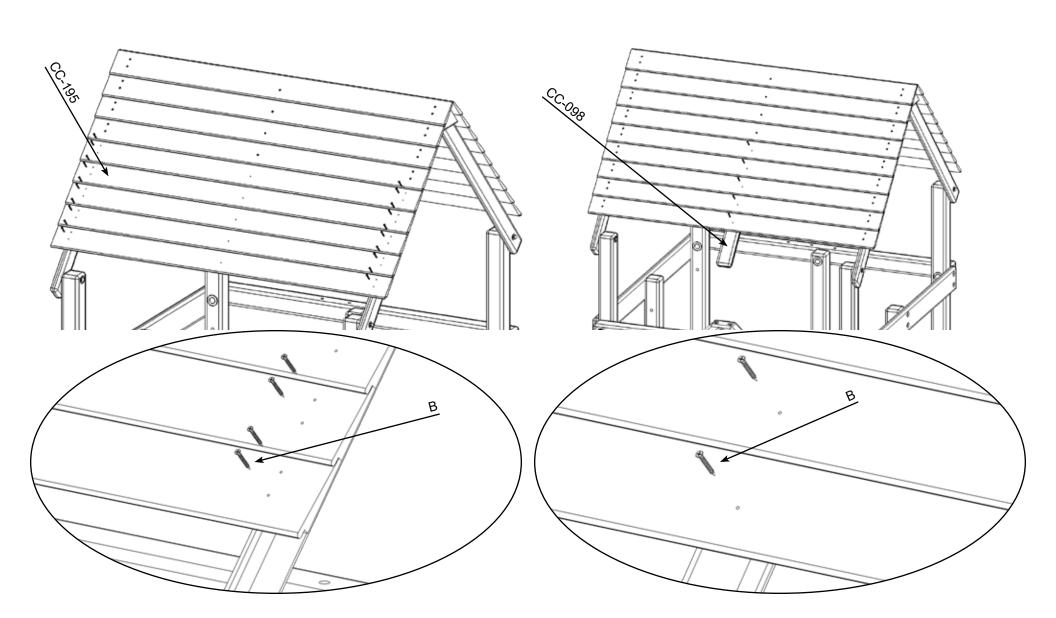

PARTS NEEDED


HARDWARE NEEDED

CC-195- 67 1/2" Wood Roof Board-

(4) (2) B- 1 1/2" Coated Deck Screw-

(40)

Fan Assembly-

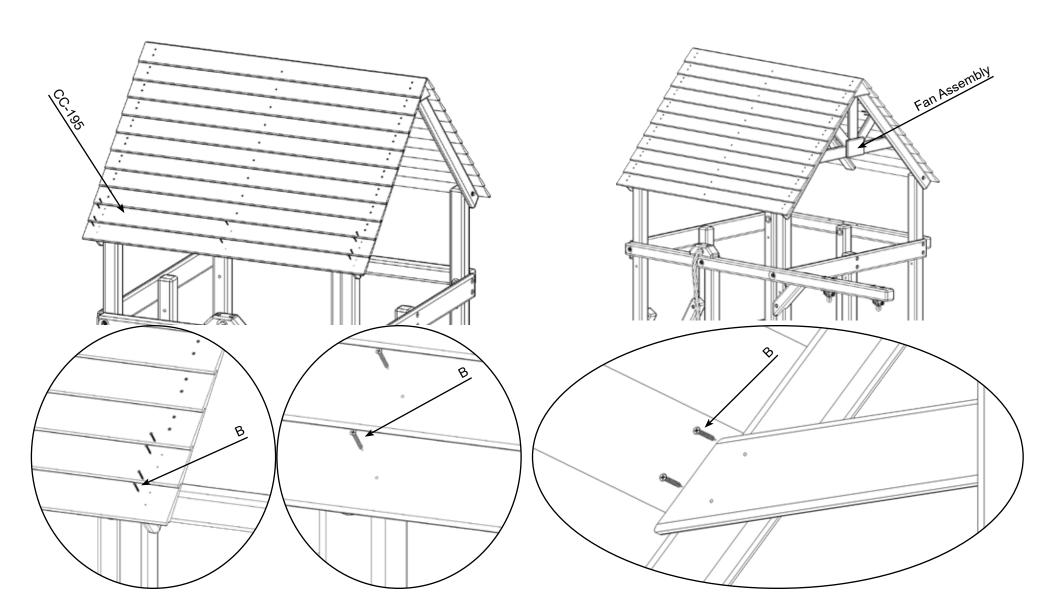


PARTS NEEDED

HARDWARE NEEDED

405-G- 20" Trapeze Bar-405-L- Telescope(1) (1) A-13-8 x 80mm Spring Clip-


(2)

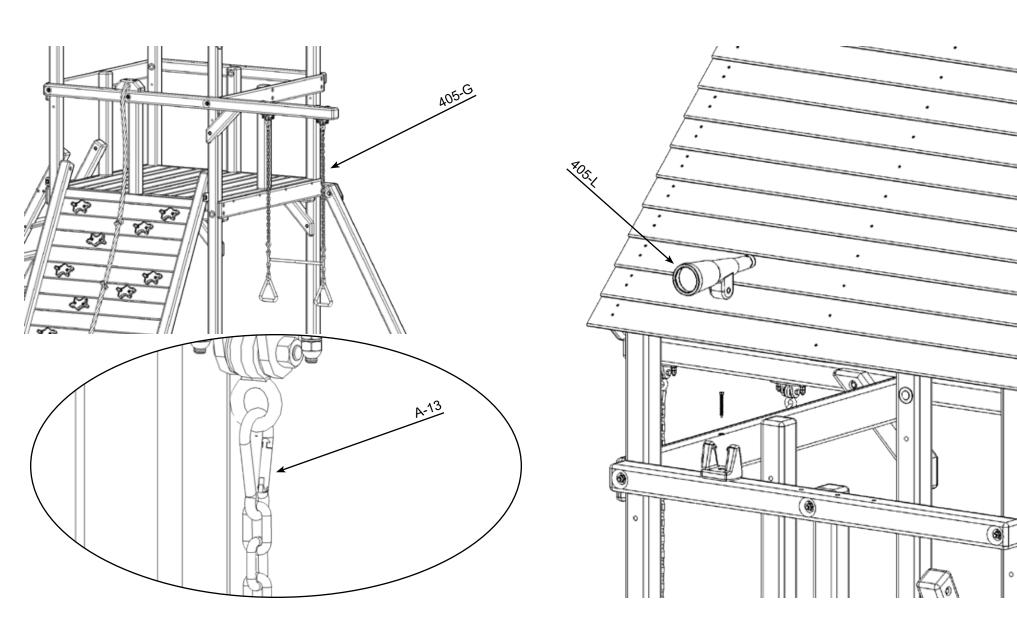

PARTS NEEDED

HARDWARE NEEDED

405-M- 19" Ships' Wheel-405-E- Playgrip Ladder Handle(1) (2) N- 1/4" USS Flatwasher-J- #14 x 2" Pan Phillips T/S- (4) (4)

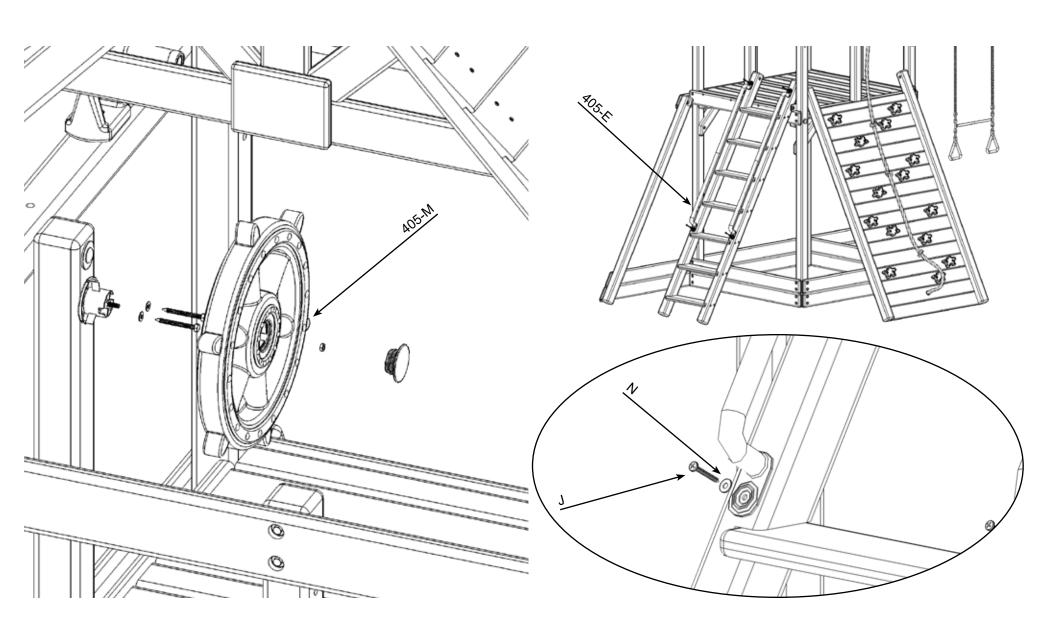


PARTS NEEDED

405-D- Playgrip Safety Handle-405-C- Swingbeam T-Plate-

HARDWARE NEEDED

(5) (1) J- #14 x 2" Pan Phillips T/S-(10)N- 1/4" USS Flatwasher-(10)SB-3- 1/2" x 3 1/2" Carriage Bolt-SB-19- 3/4" USS Flatwasher-(2) (2) (2) (2) SB-18- 1/2" USS Flatwasher-(2) SB-16- 1/2" Split Lockwasher-SB-7- 1/2" Hex Nut-(2) SB-2- 1/2" Acorn Nut Plated-

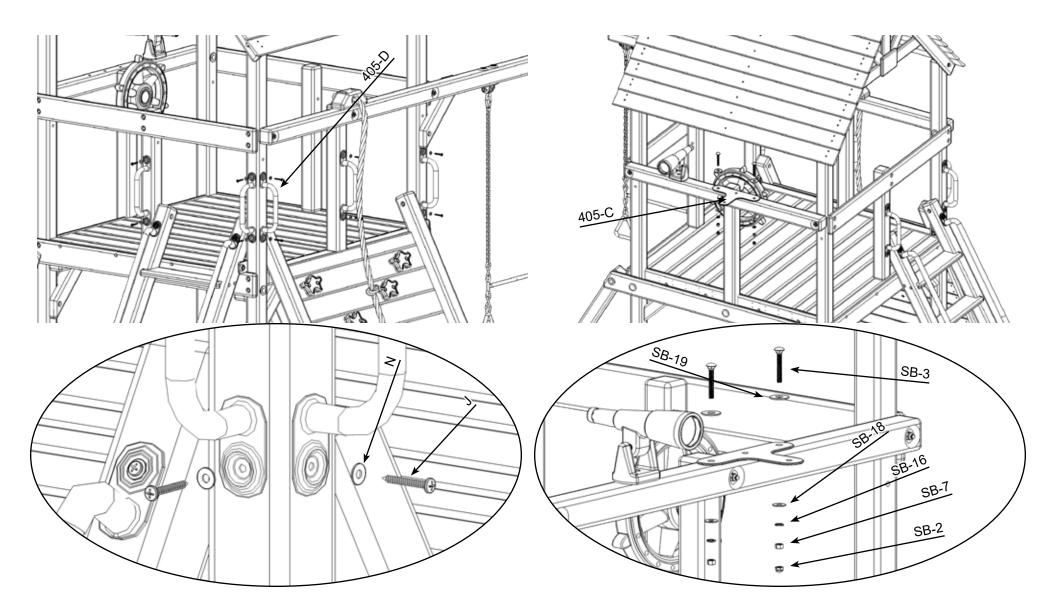

PARTS NEEDED

HARDWARE NEEDED


A-Frame
(1) SB-5- 1/2" x 9" Carriage BoltSB-19- 3/4" USS FlatwasherSB-16- 1/2" Split LockwasherSB-16- 1/2" Split LockwasherSB-2- 1/2" Acorn Nut PlatedSB-17- 3/8" USS Flatwasher(2) SB-18- 1/2" USS Flatwasher(2) SB-7- 1/2" Hex NutSB-17- 3/8" USS Flatwasher(2) SB-12- 3/8" x 5" Hex Lag ScrewSB-17- 3/8" USS Flatwasher(2)

LEVEL A-FRAME AND ATTACH AS SHOWN

AFTER ATTACHING AND LEVELING SECURE IN POSITION AS SHOWN

(1) (2)

(2) (2)

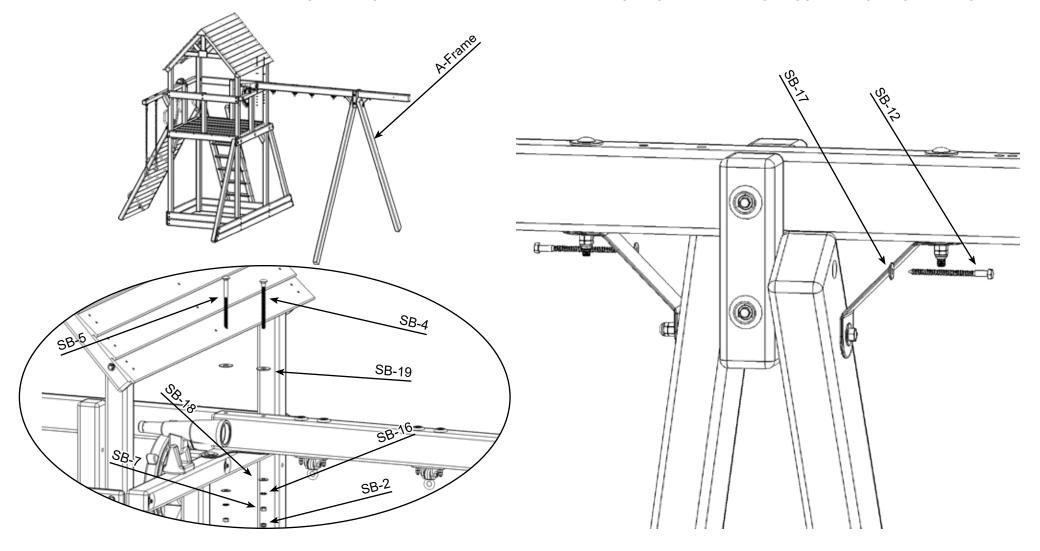

PARTS NEEDED

CC-245- 88" A-Frame Crossmember-(1) 405-J- 84" Chained Belt Swing-

(2)

HARDWARE NEEDED

SB-4- 1/2" x 7" Carriage Bolt-SB-18- 1/2" USS Flatwasher-

SB-7- 1/2" Hex Nut-

SB-21- 8 x 80mm Spring Clip-


(4)

SB-19- 3/4" USS Flatwasher-(2) SB-16- 1/2" Split Lockwasher-

(2) (2)

(2) (2) SB-2- 1/2" Acorn Nut Plated-


(2)

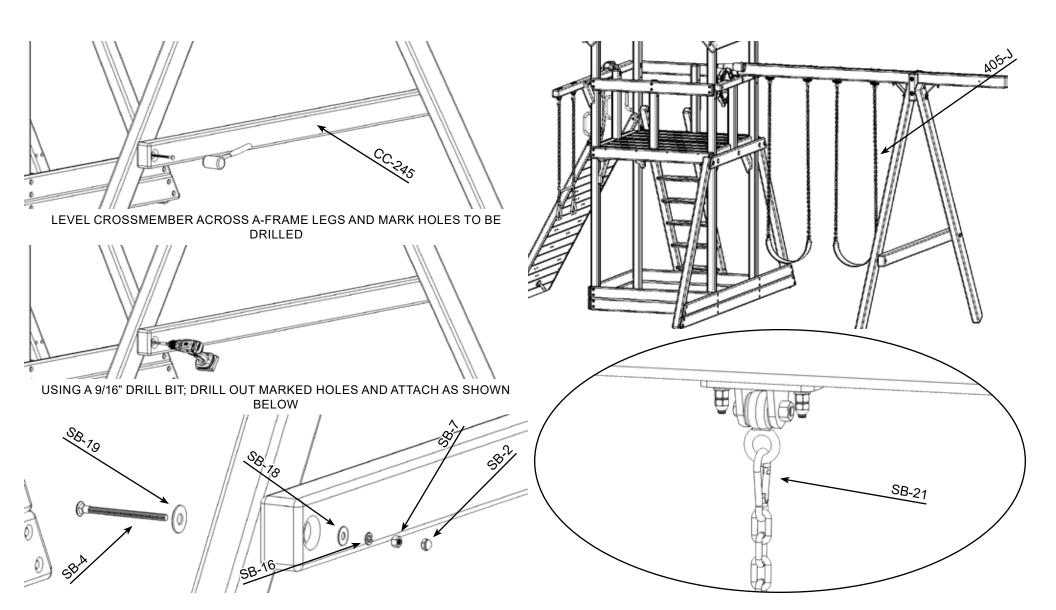

Finished Main Assembly

PARTS NEEDED

405-F- 16' Yellow Rope-	(1
405-H- Disc Swing-	(1

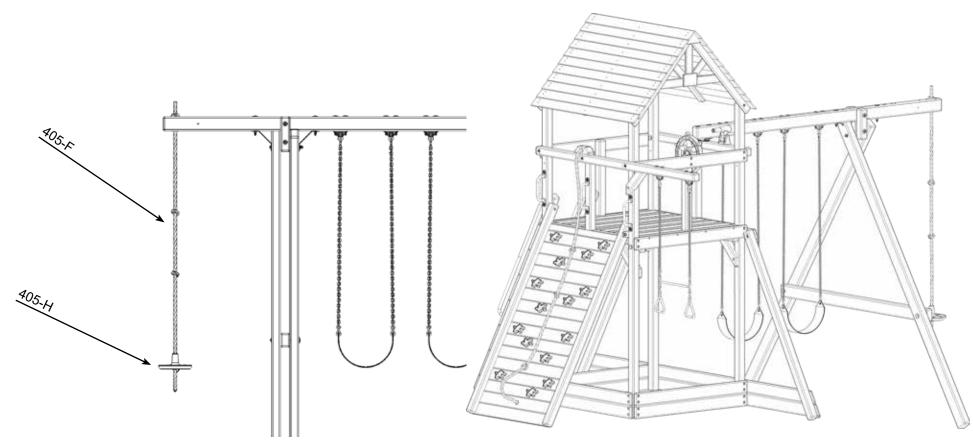

SLIP THE ROPE THROUGH THE SWINGBEAM AND TIE A KNOT. THEN TIE A KNOT EVERY 2 TO 3 FEET. PLACE THE 405-H DISC SWING ON THE ROPE AND TIE A DOUBLE KNOT SECURING IT TO THE ROPE.

Picnic Table/ Lower Floor Sub- Assemblies

(2)

PARTS NEEDED

(4)


HARDWARE NEEDED

(78)

D- 2 1/2" Coated Deck Screw-

CC-092- 12 7/8" Picnic Side Support-CC-126- 60 3/4" Picnic Table Board-CC-106- 28 1/4" Picnic Side Support-CC-117- 60 3/4" Picnic Table Board-

- CC091- 12 7/8" Center Picnic Seat Support-
- CC-113- 54" Picnic Table Board-(7) (1)
- (1) (2) CC-105- 28 1/4" Picnic Center Support-

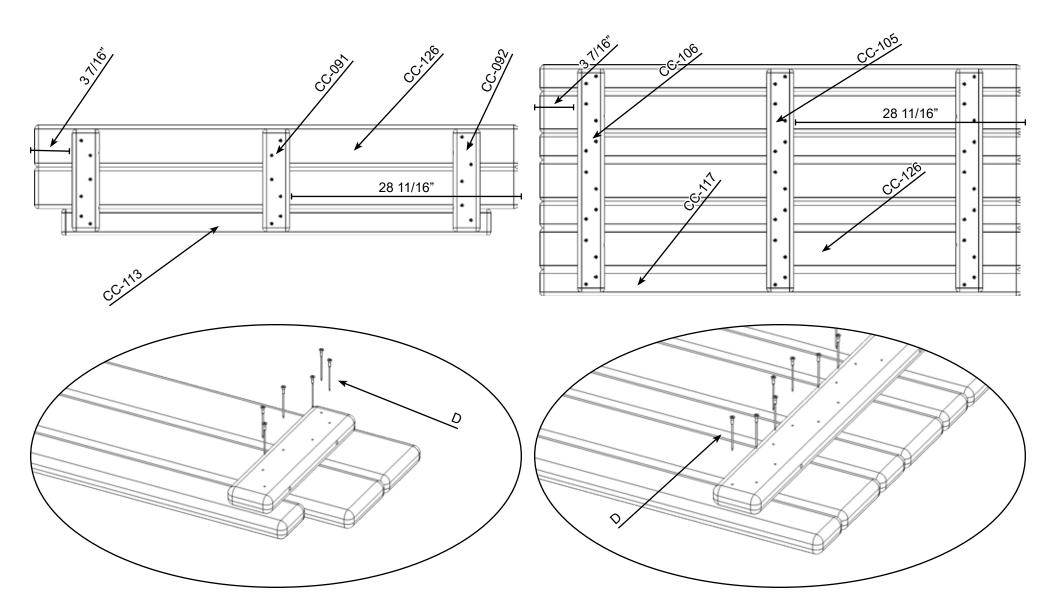

PARTS NEEDED


HARDWARE NEEDED

CC-115- 60 1/4" Picnic Support- (2) O- 3/8" USS Flatwasher-

(4)


H- 3/8" x 3 1/2" Hex Lag Screw-

(4)

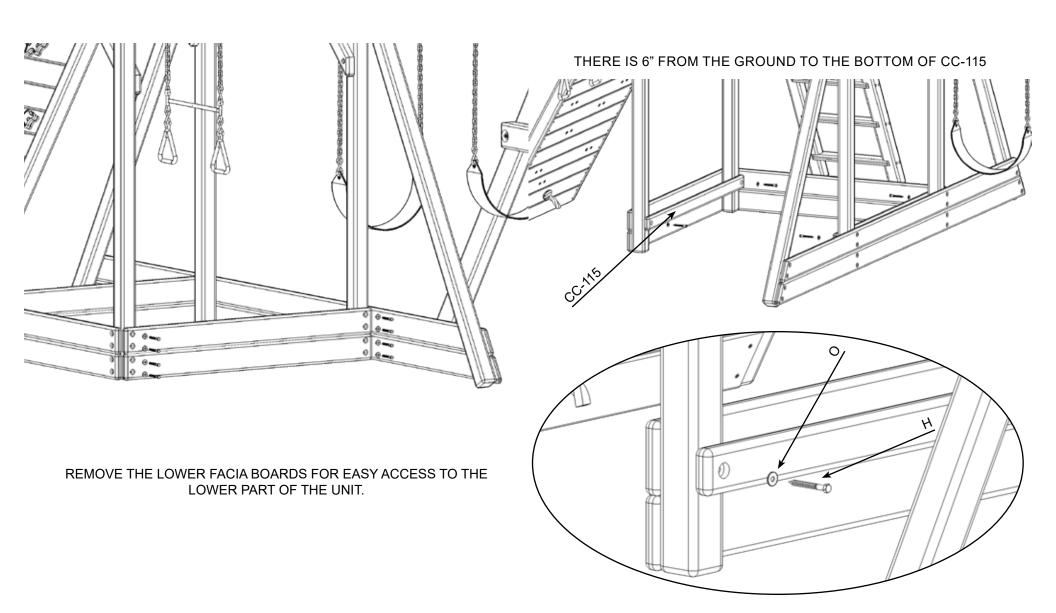

PARTS NEEDED

Seat Assembly-	(1)	G- 1/4" x 4 1/2" Hex Lag Screw-	(4)
CC-115- 60 1/4" Picnic Support-	(1)	N- 1/4" USS Flatwasher-	(4)
		O- 3/8" USS Flatwasher-	(4)
		H- 3/8" x 3 1/2" Hex Lag Screw-	(4)

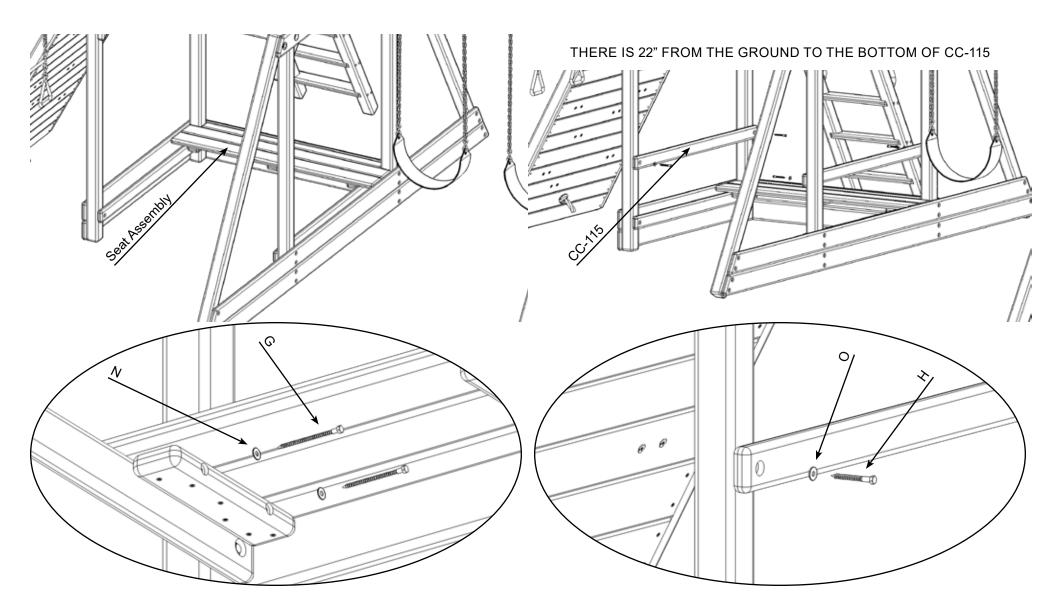



PARTS NEEDED

HARDWARE NEEDED

 Table Assembly (1)
 G- 1/4" x 4 1/2" Hex Lag Screw (8)

 Seat Assembly (1)
 N- 1/4" USS Flatwasher (8)

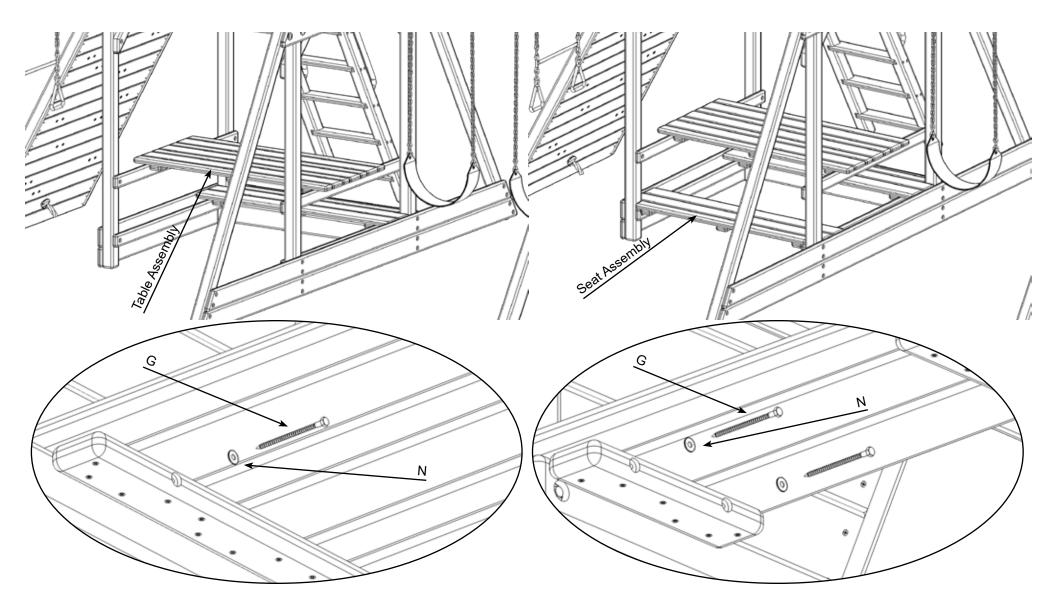

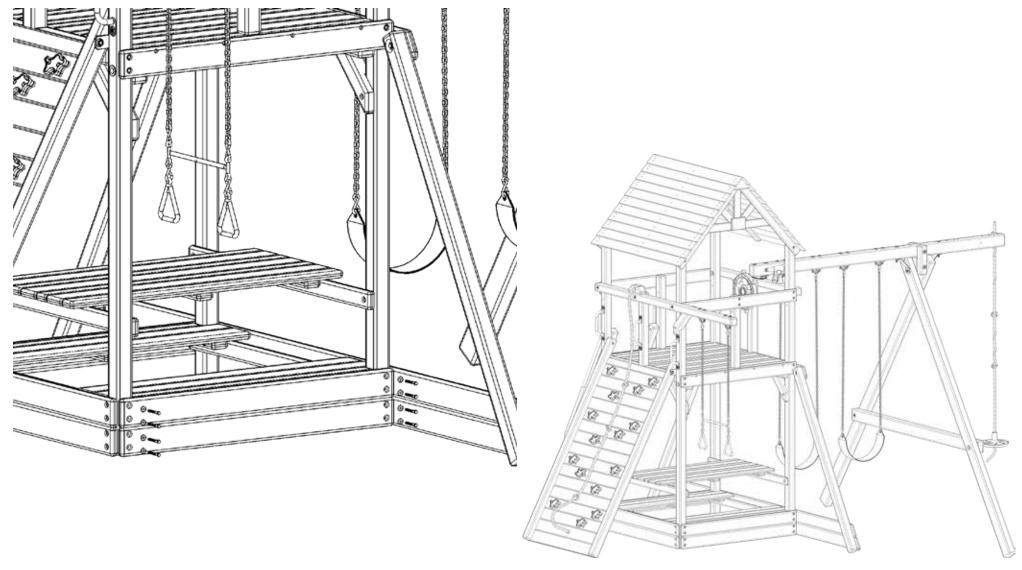

PLACE THE OUTSIDE FACIAS BACK ON THE UNIT. THE PICNIC INSTALL IS COMPLETE.

Lower Floor Install (Used Mainly For Playhouse Panels)

PARTS NEEDED

HARDWARE NEEDED


CC-115- 60 1/4" Picnic Support-

(2)

H- 3/8" x 3 1/2" Hex Lag Screw-

O- 3/8" USS Flatwasher-


(4)

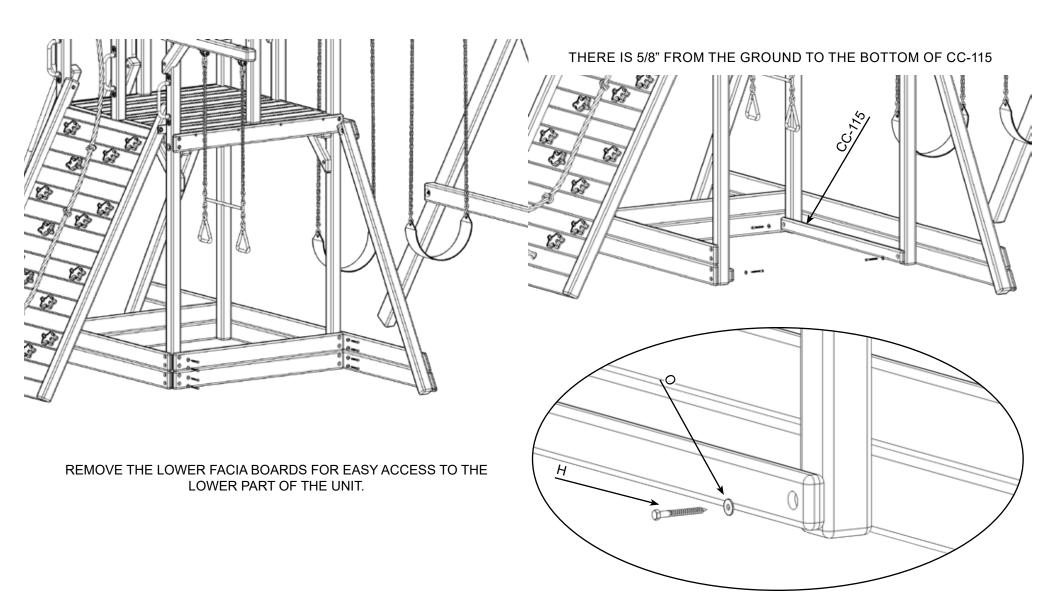

Lower Floor Install (Used Mainly For Playhouse Panels)

PARTS NEEDED

Seat Assembly-	(1)	N- 1/4" USS Flatwasher-	(4
CC-090- 60 3/4" Lower Deck Filler-	(1)	G- 1/4" x 4 1/2" Hex Lag Screw-	(4
	, ,	D- 2 1/2" Coated Deck Screw-	Ì

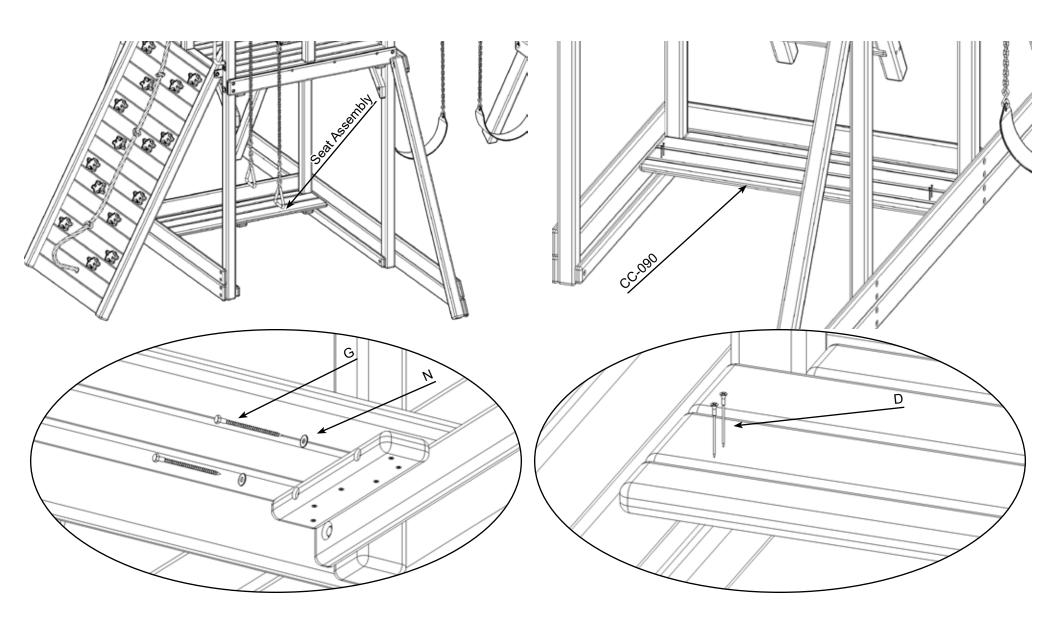

Lower Floor Install (Used Mainly For Playhouse Panels)

PARTS NEEDED


HARDWARE NEEDED

Seat Assembly-Table Assembly(1) (1)


G- 1/4" x 4 1/2" Hex Lag Screw-

N- 1/4" USS Flatwasher-

(8)

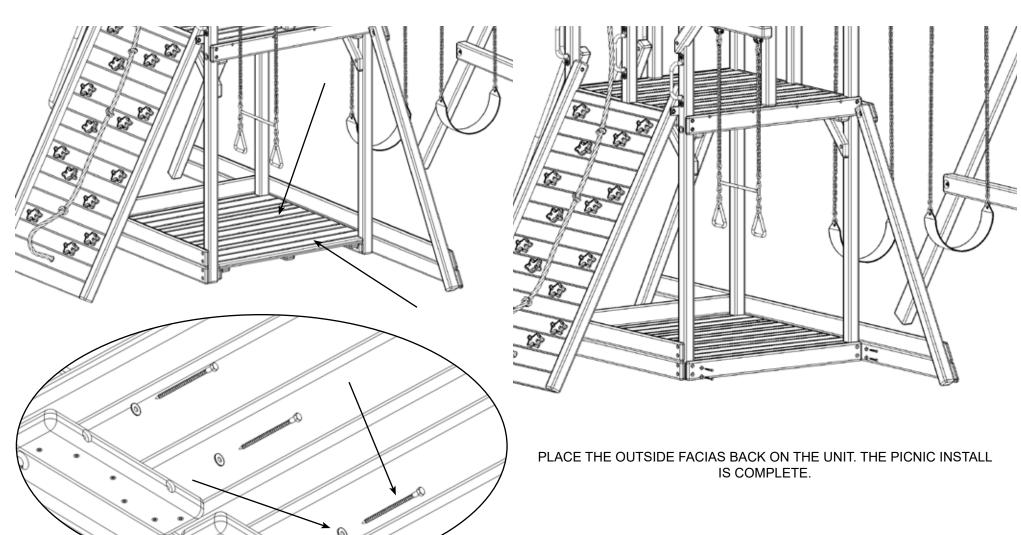


Lower Floor Install Finish (Next are the Rail Installs)

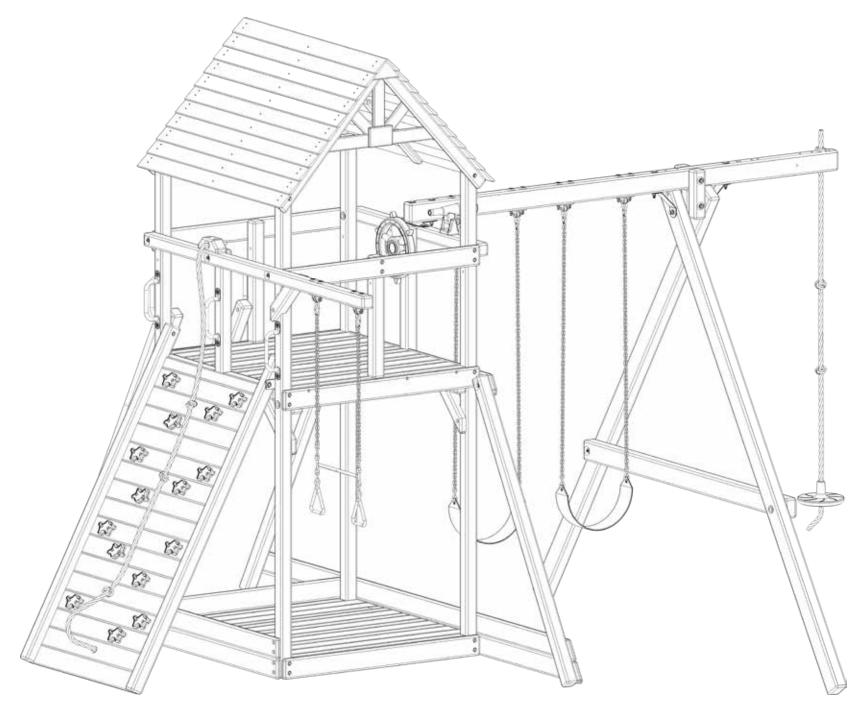

Open Rail Install

PARTS NEEDED

CC-088- 27 1/2" Rail Spindle-	(20)	D- 2 1/2" Coated Deck Screw-	(80)
CC-099- 25" Rail Top-	(4)	N- 1/4" USS Flatwasher-	(16)
CC-100- 25" Rail Bottom-	(4)	G- 1/4" x 4 1/2" Hex Lag Screw-	(8)
		F- 1/4" x 3" Hex Lag Screw-	(8)

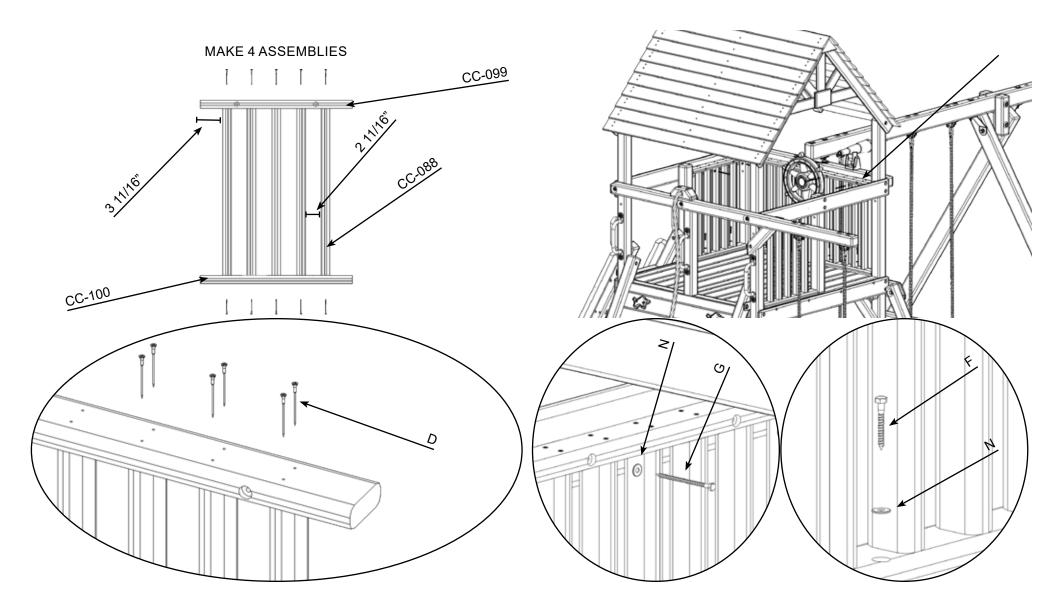


Open Rail Install


PARTS NEEDED

HARDWARE NEEDED


Slide- (1) J- #14 x 2" Pan Phillips T/S- (3) N- 1/4" USS Flatwasher- (3)

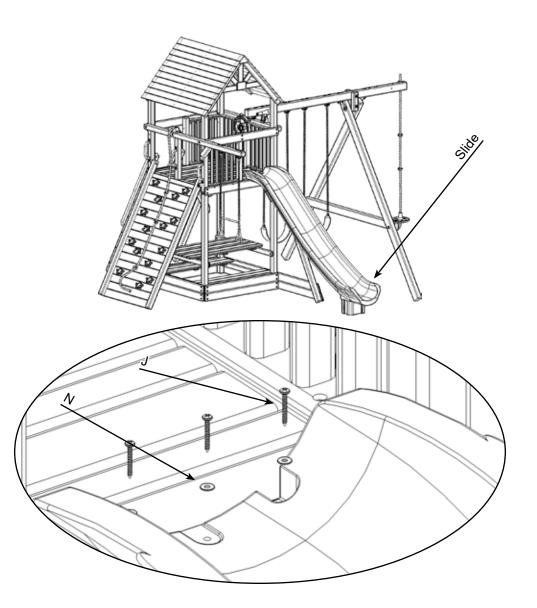

FINISHED OPEN RAIL ASSEMBLY WITH PICNIC TABLE



FINISHED OPEN RAIL ASSEMBLY WITH LOWER FLOOR




Closed Rail Install (Used For Treehouse Install)

PARTS NEEDED

HARDWARE NEEDED

(20)	D- 2 1/2" Coated Deck Screw-	(16)
(4)	TP-1- 1 5/8" Coated Deck Screw-	(144)
(4)		
(16)		
(8)		
	(4) (4) (16)	(4) TP-1- 1 5/8" Coated Deck Screw- (4) (16)

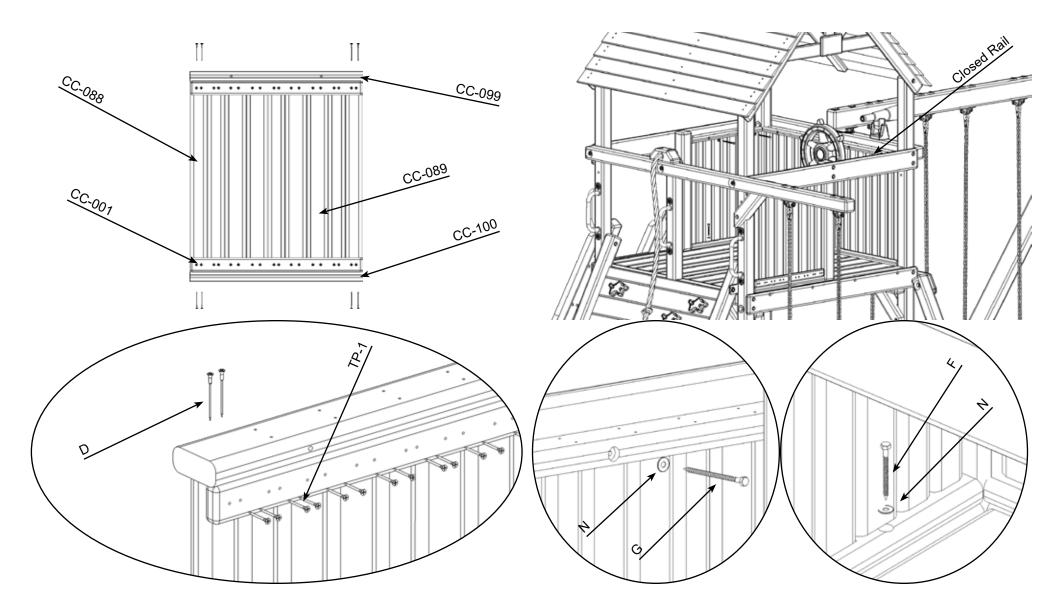


Closed Rail Install (Used For Treehouse Install)


PARTS NEEDED

HARDWARE NEEDED


Slide- (1) J- #14 x 2" Pan Phillips T/S- (3) N- 1/4" USS Flatwasher- (3)

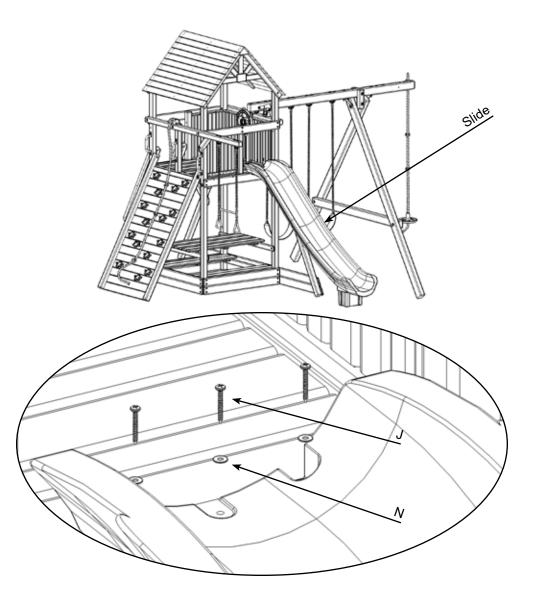

FINISHED CLOSED RAIL ASSEMBLY WITH PICNIC TABLE



FINISHED CLOSED RAIL ASSEMBLY WITH LOWER FLOOR



Playhouse Door Panel Assembly

(2)

(2)

(1)

(1)

PARTS NEEDED

HARDWARE NEEDED

408-9- 12 7/8" Upper Door Filller-408-13- 30 3/8" Under Window Filler-CC-018- 24 1/2" Door Cross Piece-408-21- 17" Playhouse Left Shutter-

CC-048- 24 1/2" Large Door Bottom Angled-

(1)

(3)


(1)

408-27-63 11/16" Door Large Board-

(3) 408-2- 63 11/16" Slim Door Board-(2) CC-016- 20" Playhouse Window Arch-

408-22- 17" Playhouse Right Shutter-

PP-2- 1 5/8" Coated Deck Screw-(40)

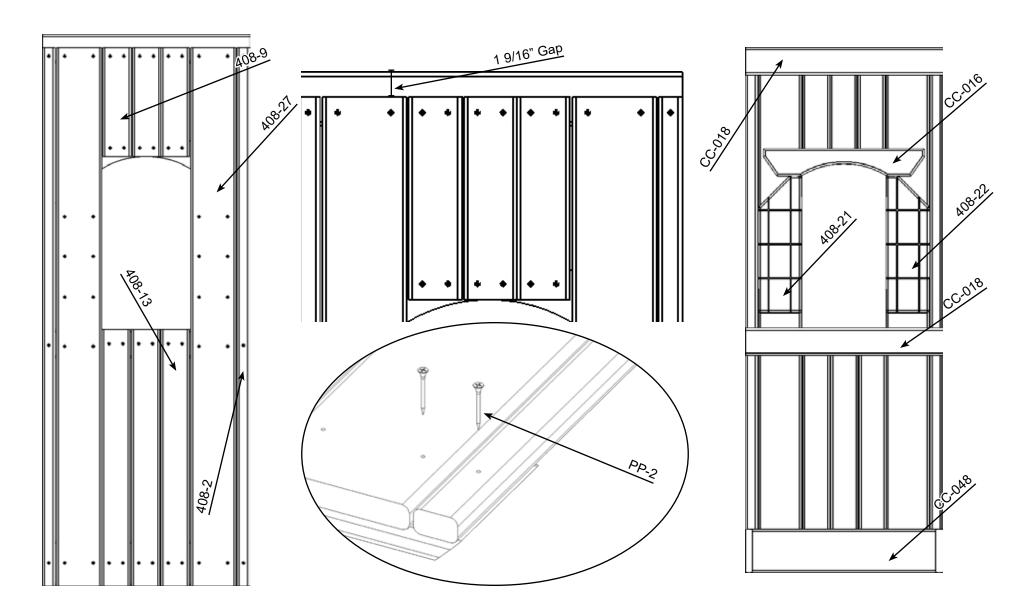

Door Side Panel

PARTS NEEDED

HARDWARE NEEDED


(56)

PP-2- 1 5/8" Coated Deck Screw-

(4)

408-29- 65 5/8" Shutter Board-408-17- 30 3/8" Lower Door Side Filler-408-21- 17" Playhouse Left Shutter-CC-016- 20" Playhouse Window Arch-

- (2) 408-16- 14" Above Window Filler Door Side-
- (4) CC-027- 32 1/8" Door Side Cross Facia- (2)
- (1) 408-22- 17" Playhouse Right Shutter- (1)
- (1) CC-049- 32 1/8" Large Lower Door Side Crosspiece- (1)

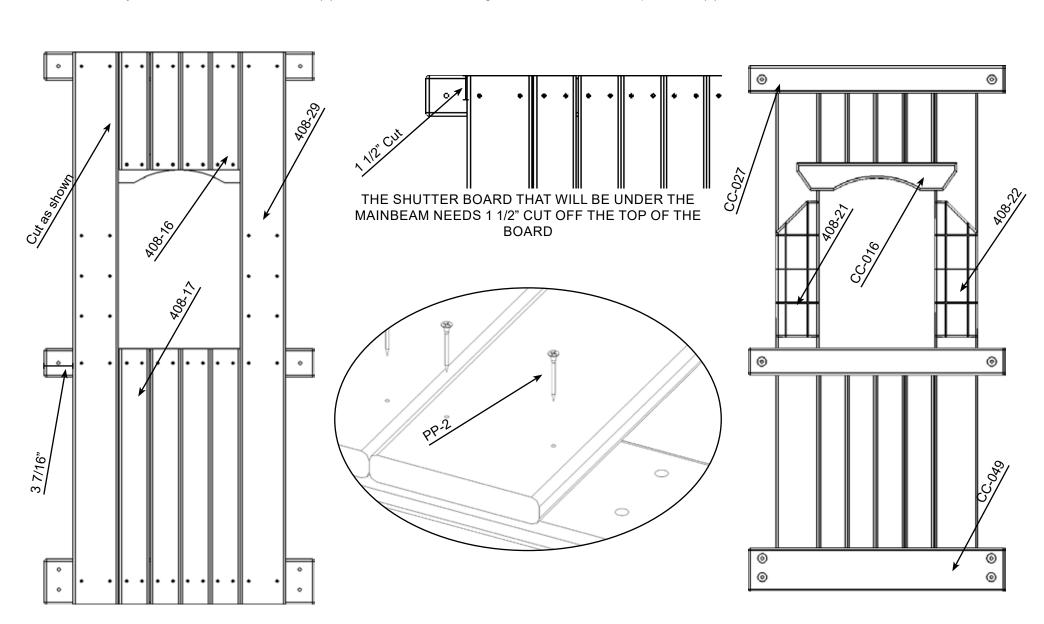


Playhouse Store Assembly

PARTS NEEDED

HARDWARE NEEDED

408-15- 64 1/8" Store End Board-	(2)	408-18- 14" Upper Store Center Filler-	(1)
408-10- 14" Above Window Filler-	(6)	408-20- 14" Store Upper Wide Filler-	(2)
CC-050- 35 1/4" Playhouse Store Coutner-	(1)	408-13- 30 3/8" Under Window Filler-	(6)
408-19- 30 3/8" Store Lower Center Filler-	(1)	408-24- 30 3/8" Playhouse Under Store Wide Board-	(2)
CC-040- 60 3/4" Store Cross Facia-	(2)	408-21- 17" Playhouse Left Shutter-	(1)
408-22- 17" Playhouse Right Shutter-	(1)	CC-030- 44 1/2" Store Arch-	(1)
CC-108-35" Store Counter Support-	(1)		()

PP-2- 1 5/8" Coated Deck Screw- (78) PP-3- 2" Coated Deck Screw- (4)

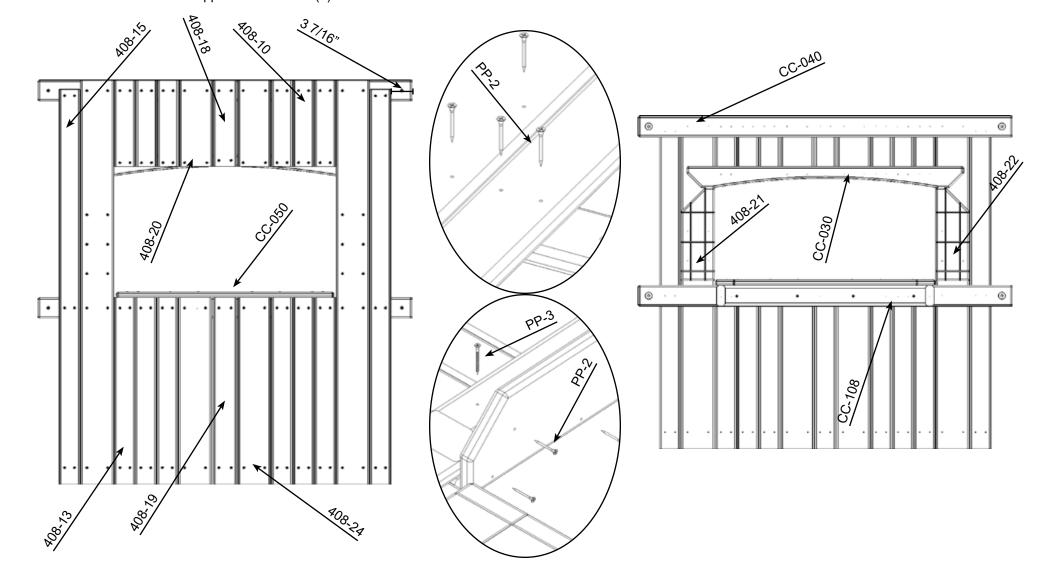

Rockwall Side Panel


PARTS NEEDED

HARDWARE NEEDED

(94)

PP-2- 1 5/8" Coated Deck Screw-

408-29- 65 5/8" Shutter Board-	(2)	408-10- 14" Above Window Filler-	(8)
408-13- 30 3/8" Under Window Filler-	(8)	408-4- 64 1/8" Center Playhouse Panel Board-	(1)
CC-016- 20" Playhouse Window Arch-	(2)	408-21- 17" Playhouse Left Shutter-	(1)
408-22- 17" Playhouse Right Shutter-	(1)	CC-037- 60 1/4" Side Cross Facia-	(2)

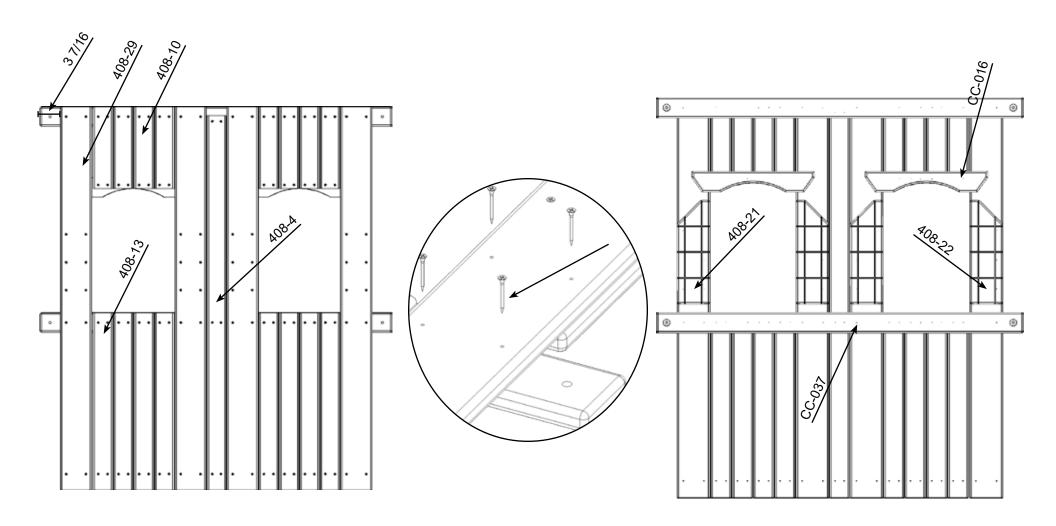

Wing Side Panel

PARTS NEEDED

HARDWARE NEEDED

408-28- 64 1/4" Shutter Board Wing Side-408-3-62 3/4" Center Wing Side Board-408-21- 17" Playhouse Left Shutter-


- 408-9- 12 7/8" Upper Door Filler-
- (4) (1) CC-037- 60 1/4" Side Cross Facia-
- (1) 408-22- 17" Playhouse Right Shutter-

PP-2- 1 5/8" Coated Deck Screw-

(92)

(2) (1)

(8)

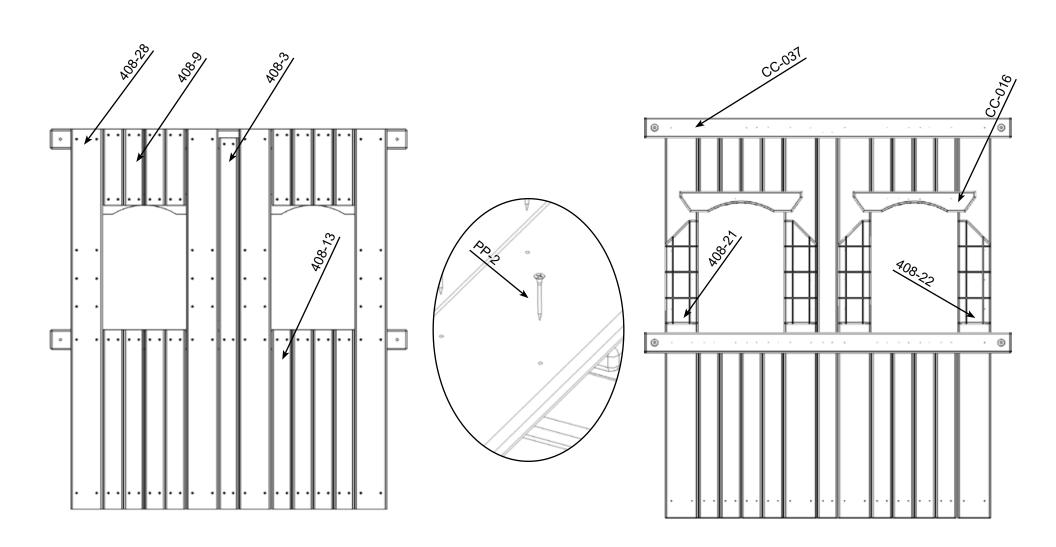

Playhouse Panel Install

PARTS NEEDED


HARDWARE NEEDED

Wing Side Panel-Store Panel(1) (1) PP-7- 3/8" USS Flatwasher-

PP-4- 3/8" x 3 1/2" Hex Lag Screw-

PP-2- 1 5/8" Coated Deck Screw-

(8) (8) (52)

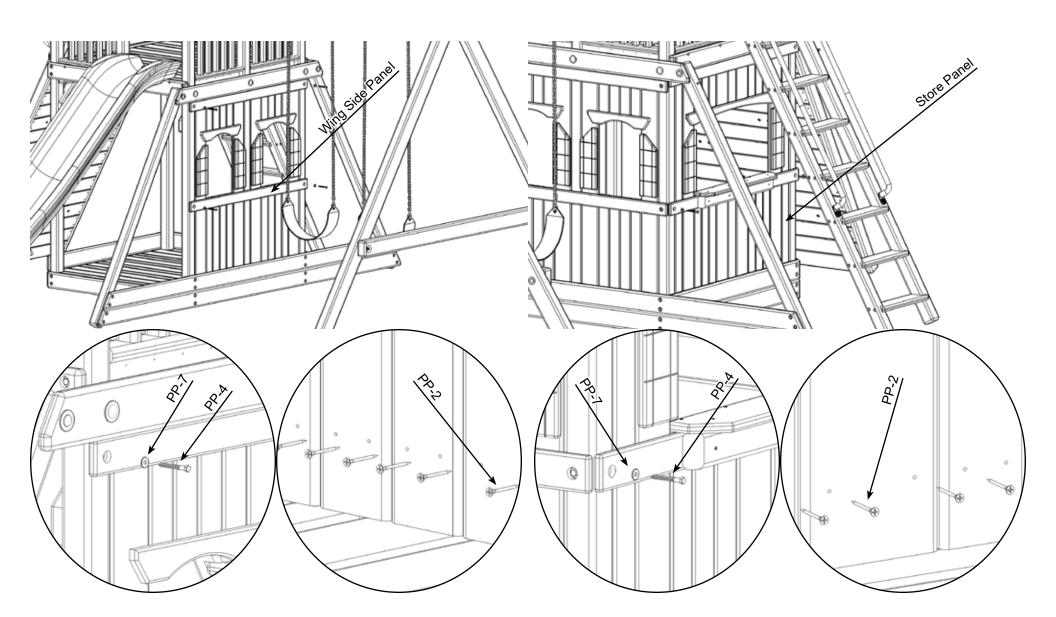


Playhouse Panel Install

PARTS NEEDED

HARDWARE NEEDED

Rockwall Side Panel-	(1)	PP-4- 3/8" x 3 1/2" Hex Lag Screw-	(12)
Door Side Panel-	(1)	PP-7- 3/8" USS Flatwasher-	(12)
		PP-2- 1 5/8" Coated Deck Screw-	(26)
		PP-1- 90 Degree Bracket-	(2)
		PP-6- 1/4" USS Flatwasher-	(4)
		PP-5- #1/Ly 1" Pan Philling T/S-	(4)

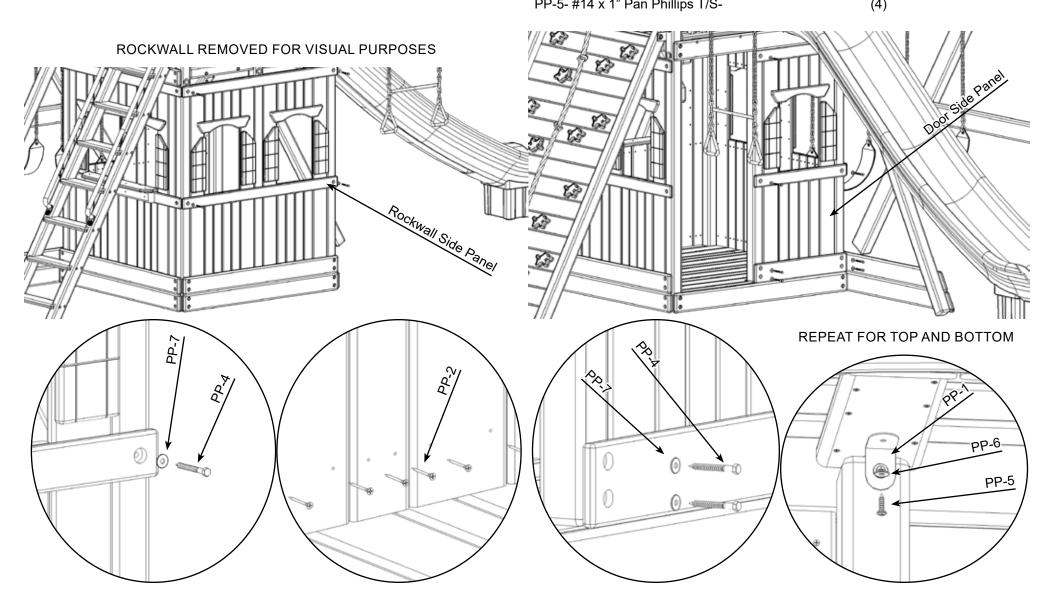

Playhouse Panel Install


PARTS NEEDED

HARDWARE NEEDED

 408-1- 63 1/16" Door Stop (1)
 PP-2- 1 5/8" Coated Deck Screw (4)

 Door Panel (1)
 PP-8- Hinges (2)

 PP-5- #14 x 1" Pan Phillips T/S (12)

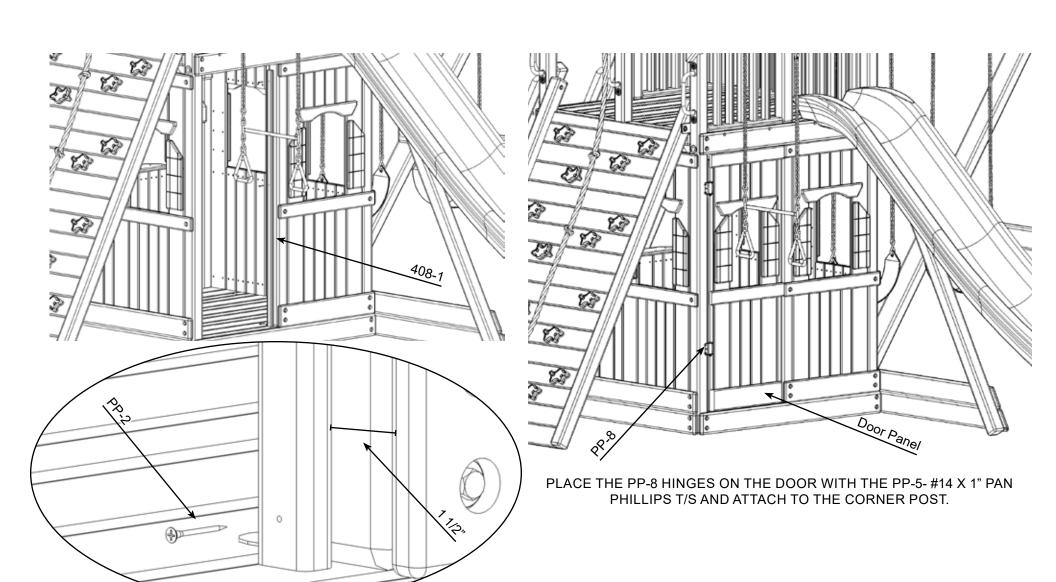

Playouse Panel Install

Playouse Panel Install Finish

HARDWARE NEEDED

PARTS NEEDED


(1) (1)


CC-005- 6" Door Knob Plate-


PP-8- Handle-

PP-2- 1 5/8" Coated Deck Screw-


(4)

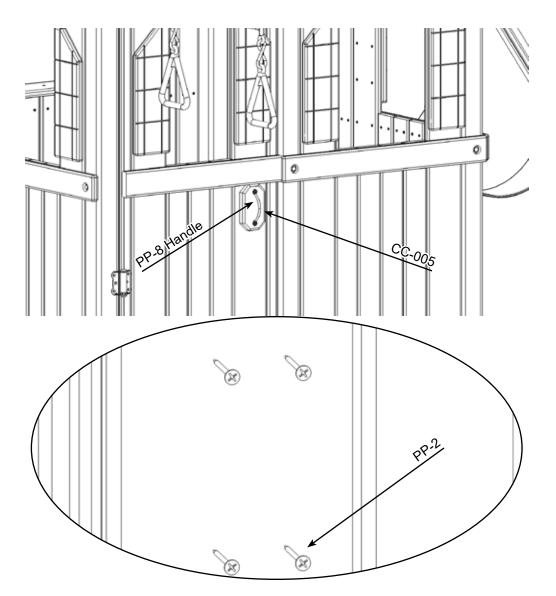





CLOSED RAIL ASSEMBLY WITH PLAYHOUSE PANELS



Rockwall Side Treehouse Panel

(1)

(4)

PARTS NEEDED


HARDWARE NEEDED

(36)

TP-1- 1 1/2" Coated Deck Screw-

406-6- 19 1/2" Side Panel End Board-406-4- 10 1/2" Side Center Holder-406-11-60 1/4" Side Facia-CC-058- 14" Side Right Shutter-

- (2) 406-5-18" Side Center Panel Board-
- (1) 406-18- 19 1/2" Side Shutter Board-
 - CC-057- 14" Side Left Shutter-(2)
- (1) (2)

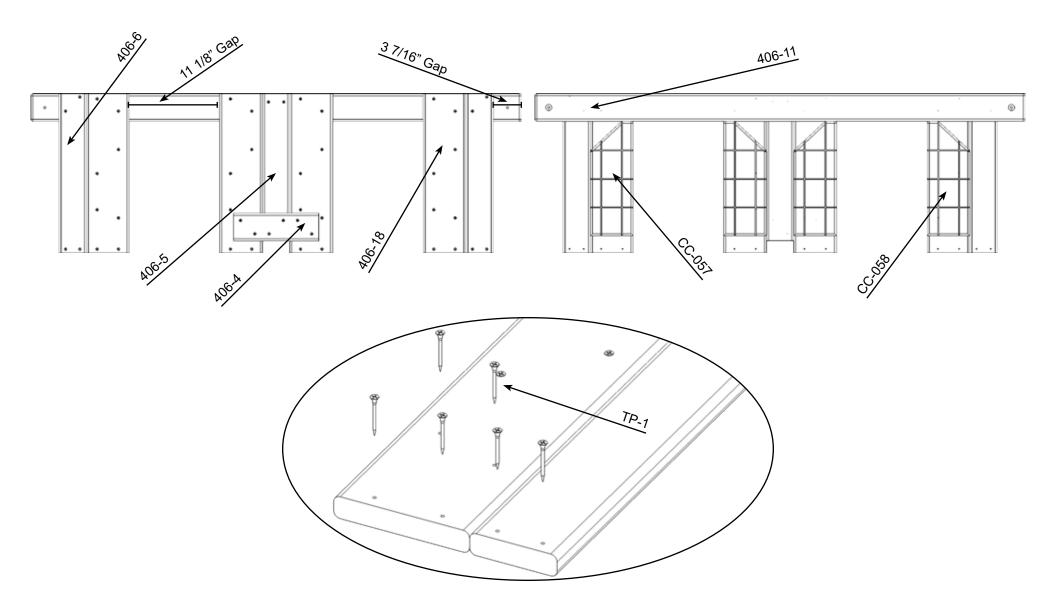

Swingbeam Side Treehouse Panel

(4)

(1)


PARTS NEEDED

HARDWARE NEEDED

406-6- 19 1/2" Side Panel End Board-406-4- 10 1/2" Side Center Holder-CC-058- 14" Side Right Shutter-406-13-9 1/8" Left SB Side Shutter-

- (2) 406-18- 19 1/2" Side Shutter Board-
- (1) 406-5-18" Side Center Panel Board-
- (2) CC-057- 14" Side Left Shutter-
- (1) 406-11-60 1/4" Side Facia-
- (1) (1)

TP-1- 1 1/2" Coated Deck Screw-(36)

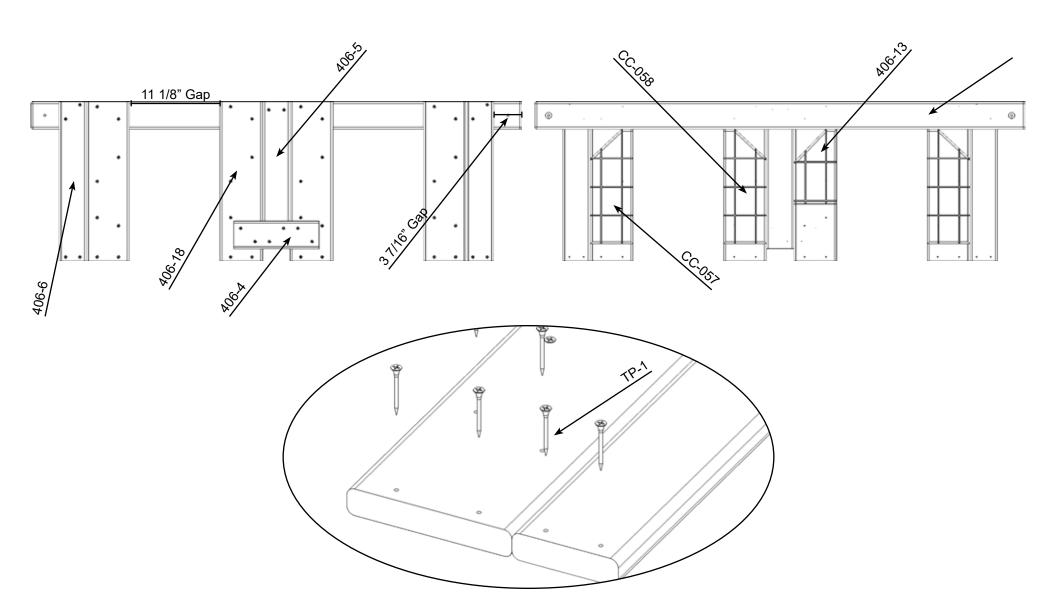


PARTS NEEDED

HARDWARE NEEDED

(1) (1) (4) SB Side Panel-RW Side Panel-

406-8- 26 1/4" End Treehouse Panel Board-

TP-1- 1 1/2" Coated Deck Screw-(40)

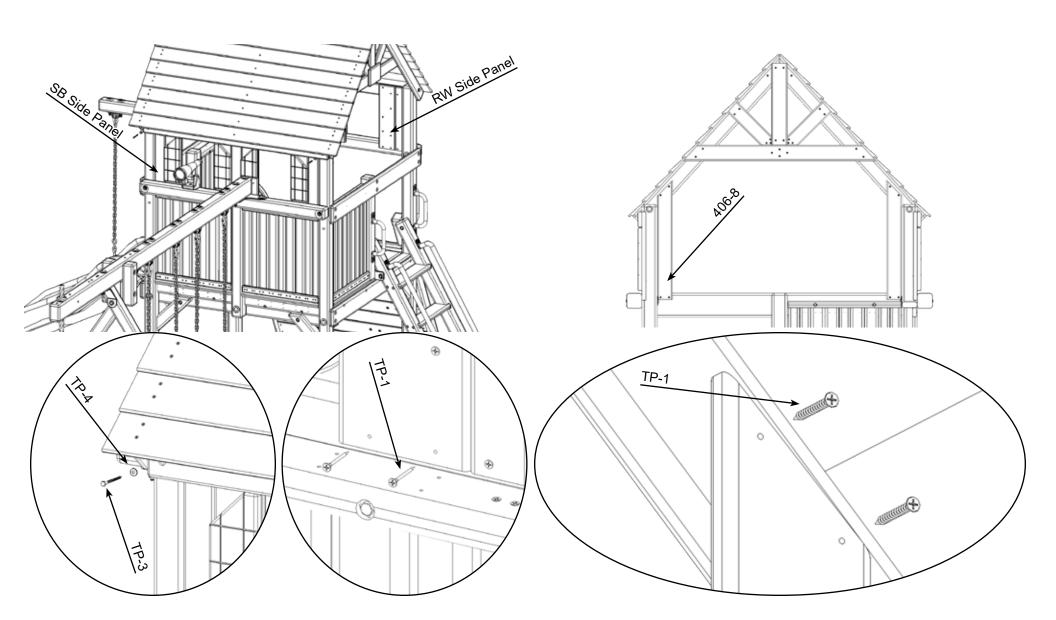


PARTS NEEDED

HARDWARE NEEDED

406-20- 30 1/2" End Panel Board-406-10- 45 3/8" Panel Board #2(4) (2) TP-1- 1 1/2" Coated Deck Screw-

(52)

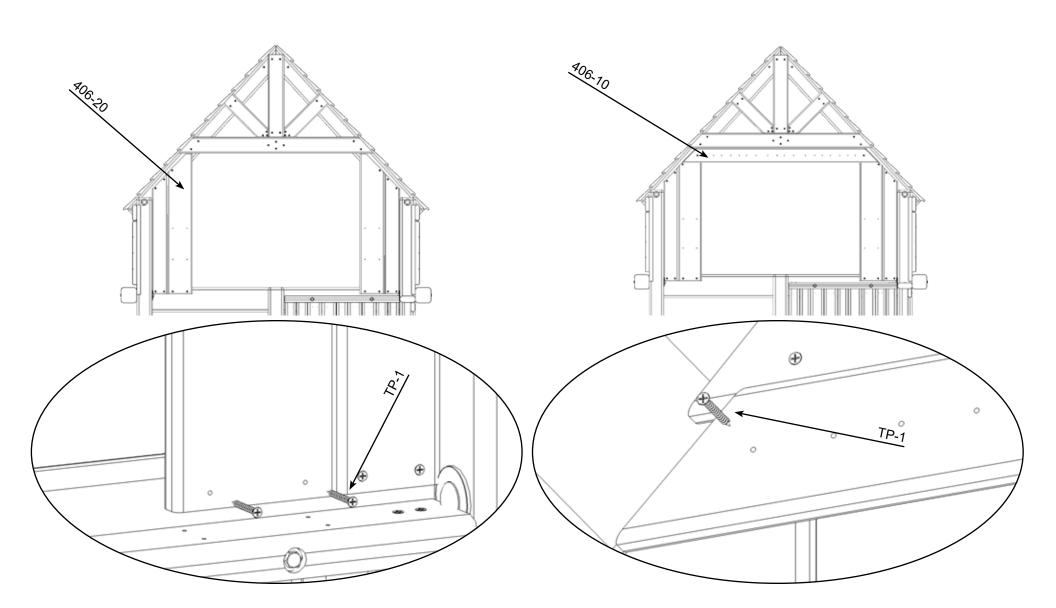

PARTS NEEDED

HARDWARE NEEDED


406-3- 10 1/2" Treehouse Panel Board #1-406-12- 10 1/2" Center Panel Board(8)

TP-1- 1 1/2" Coated Deck Screw-

(40)

406-19- 30 1/2" Large Panel Board-

(4) (4)

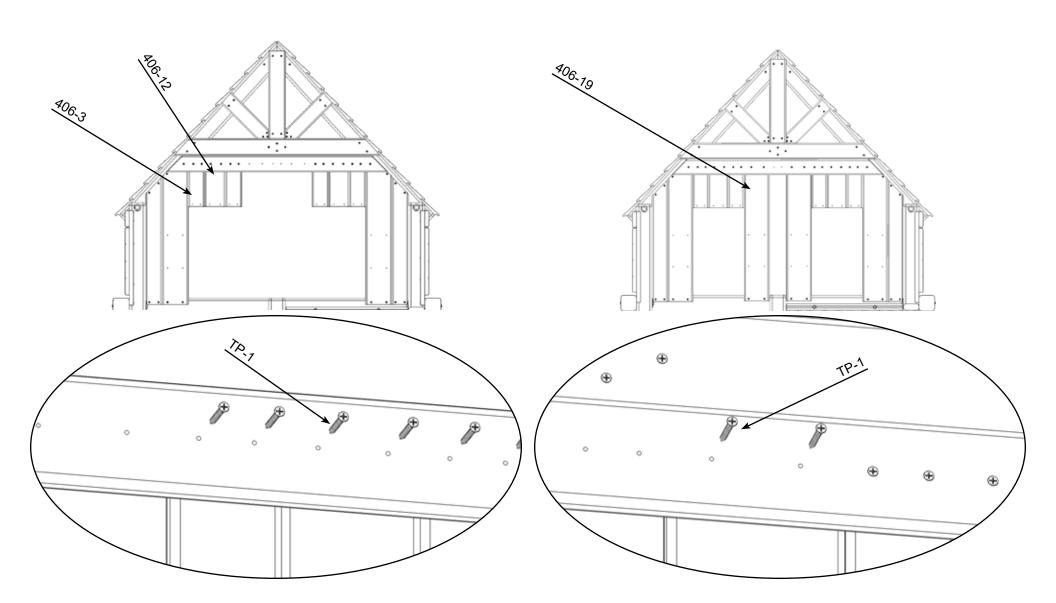

PARTS NEEDED


HARDWARE NEEDED

406-9- 29" Center Panel Board-

TP-1- 1 1/2" Coated Deck Screw-

(44)



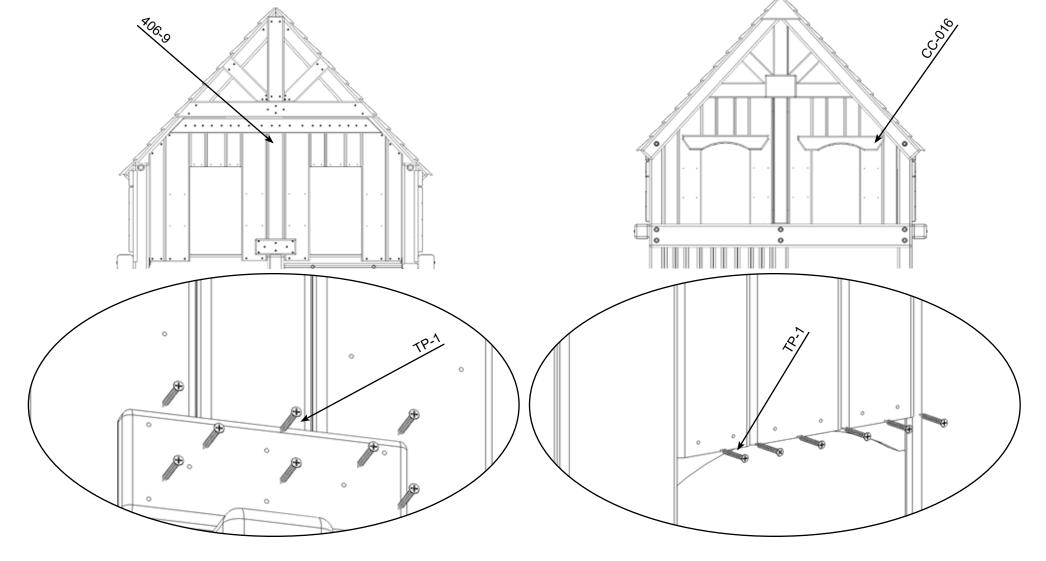

Treehouse Finished Looks


(32)

TP-1- 1 1/2" Coated Deck Screw-


HARDWARE NEEDED

PARTS NEEDED

406-17-15" Left Shutter-406-16- 15" Right Shutter(4) (4)

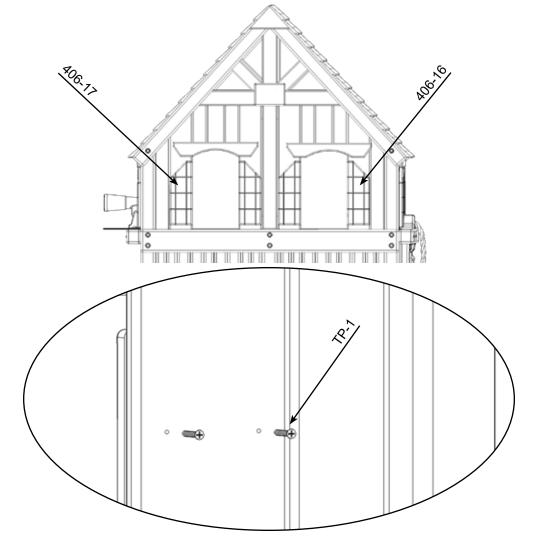



FINSHED TREEHOUSE ASSEMBLY WITH PICNIC TABLE



FINSHED TREEHOUSE ASSEMBLY WITH PLAYHOUSE PANELS





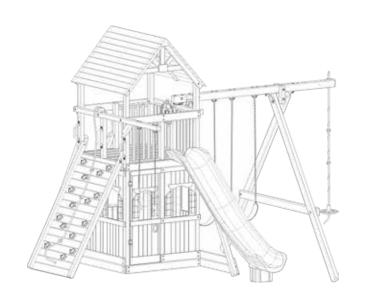

OF BENGELLES

